


## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 100 MΩ Min
- Dielectric Withstanding Voltage : 500V AC RMS 60 Seconds

### MATERIAL

- Insulator : Nylon PA9T, UL94V-0
  - Contact : Phosphor Bronze
  - Contact Plated : Tin Plated or Gold Plated
- Operation Temperature : - 25°C to + 85°C

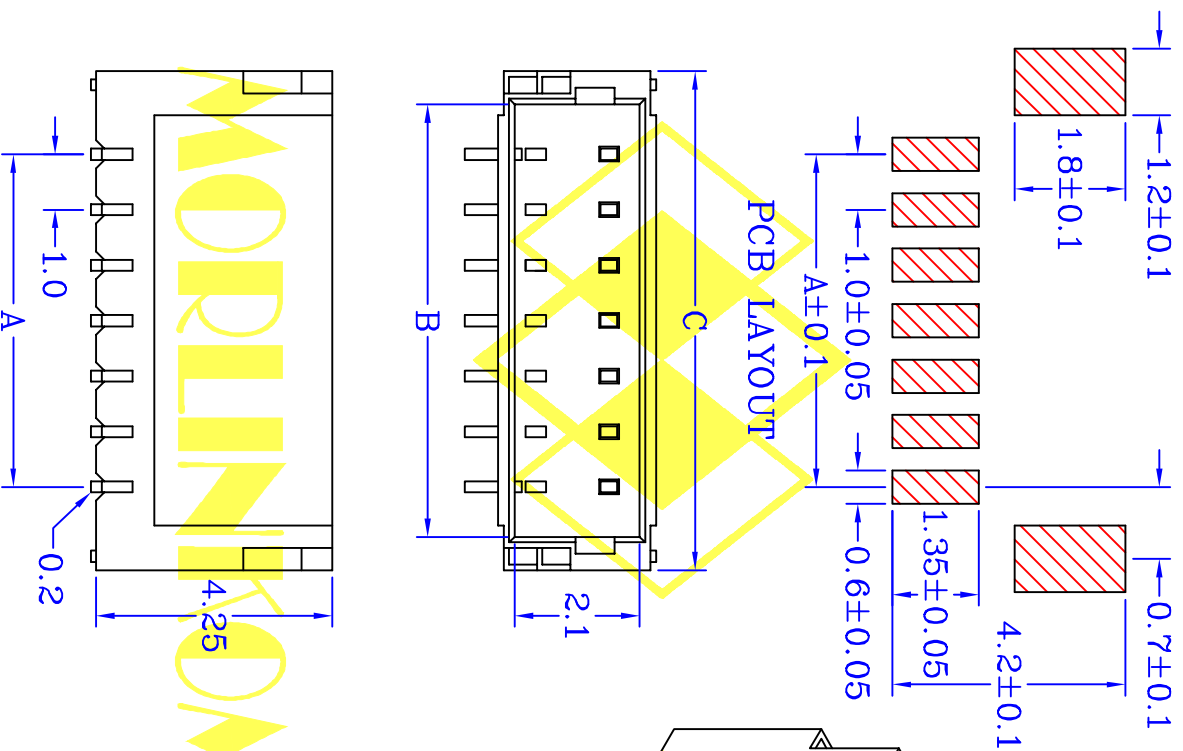

SPYK01S1XTM4	DIMENSIONS		
CONTACTS	A	B	C
2	1.00	2.40	4.00
3	2.00	3.40	5.00
4	3.00	4.40	6.00
5	4.00	5.40	7.00
6	5.00	6.40	8.00
7	6.00	7.40	9.00
8	7.00	8.40	10.00
9	8.00	9.40	11.00
10	9.00	10.40	12.00
11	10.00	11.40	13.00
12	11.00	12.40	14.00
13	12.00	13.40	15.00
14	13.00	14.40	16.00
15	14.00	15.40	17.00
16	15.00	16.40	18.00
17	16.00	17.40	19.00
18	17.00	18.40	20.00
19	18.00	19.40	21.00
20	19.00	20.40	22.00
21	20.00	21.40	23.00
22	21.00	22.40	24.00

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpsts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY  
FUJFU

日期 DATE  
2011/03/31

核對 CHECKED BY  
WENDY

比例 SCALE  
1:1

SPYK01S1XTM4

圖號 700-XXS-1.0  
DRAWING NO.