


## SPECIFICATIONS

### ELECTRICAL




- Contact Current Rating : 7 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1,500V AC RIMS 60 Seconds
- Voltage Rating : 250V AC/DC

### MATERIAL

- Insulator : Nylon 66 UL94V-0
  - Contact : Brass
  - Contact Plated : Tin Plated
  - Poles : 2 - 24
- Operation Temperature : - 25°C to + 85°C

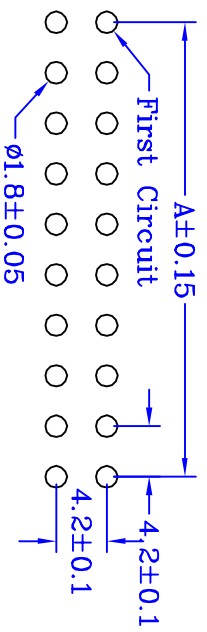

PCB LAYOUT

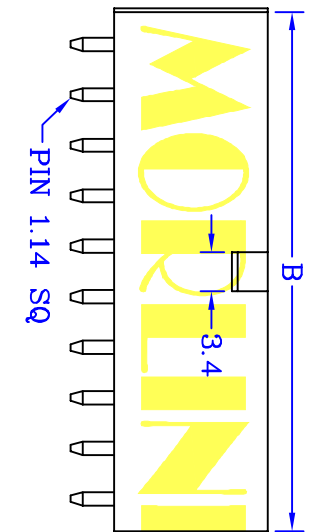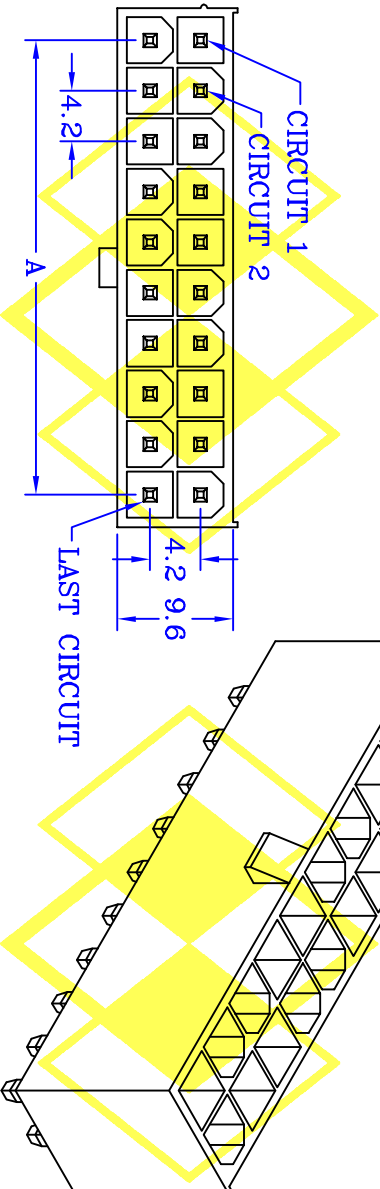

PXWH01S2XXTPBASQ CONTACTS	DIMENSIONS	
	A	B
02	4.20	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788

FAX:886-2-2686-0018

E-MAIL: Centron@tpnts6.seed.net.tw

E-MAIL: Cen8888@gmail.com

繪圖

DRAWN BY

FUFU

日期

2011/03/31

PXWH01S2XXTPBASQ

圖號

718-2XX-SQ

核對

CHECKED BY

WENDY

比例

SCALE

1:1

DRAWING NO.