
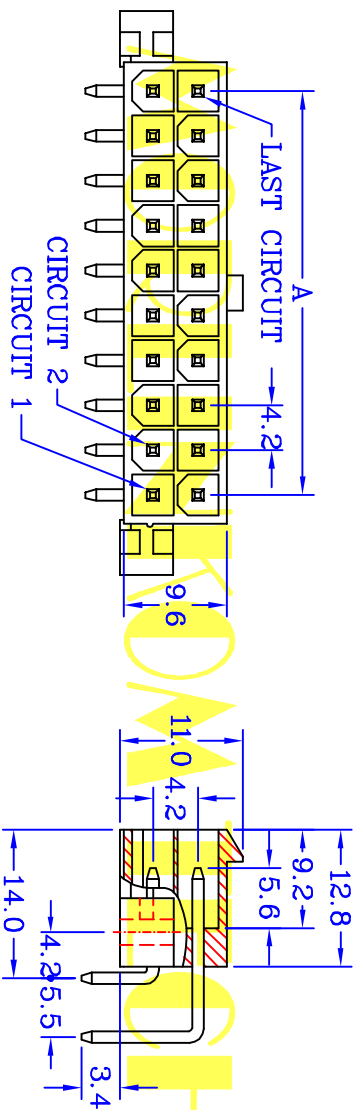


PCB LAYOUT

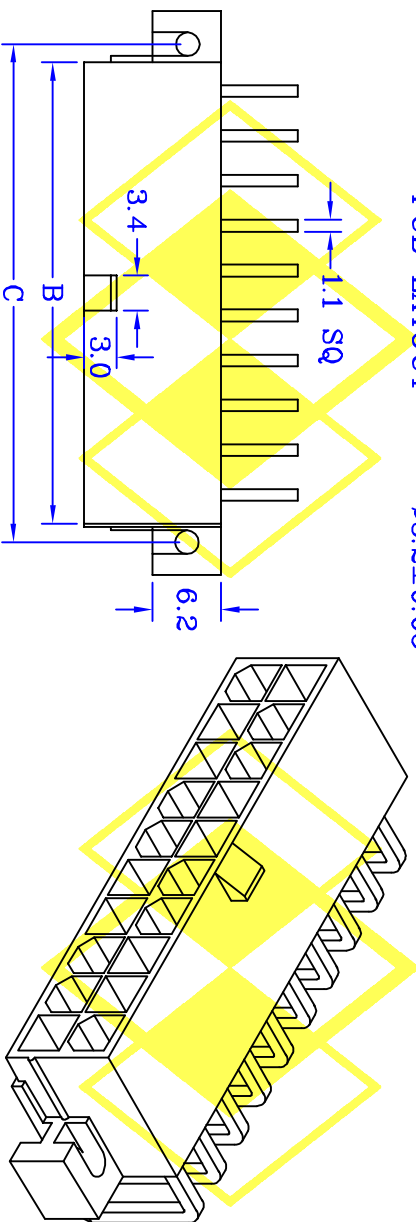

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 7 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1,500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
- Contact : Brass
- Contact Plated : Tin Plated
- Poles : 2 - 24

Operation Temperature : - 25°C to + 85°C

PXWH01R2XXTPB4#2 CONTACTS	DIMENSIONS		
	A	B	C
02	---	5.60	9.40
04	4.20	9.80	13.60
06	8.40	14.00	17.80
08	12.60	18.20	22.00
10	16.80	22.40	26.20
12	21.00	26.60	30.40
14	25.20	30.80	34.60
16	29.40	35.00	38.80
18	33.60	39.20	43.00
20	37.80	43.40	47.20
22	42.00	47.60	51.40
24	46.20	51.80	55.60

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788

FAX:886-2-2686-0018

E-MAIL: Centron@tpnts6.seed.net.tw

E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY
FUJFU

核對 CHECKED BY
WENDY

日期 DATE
2011/03/31

比例 SCALE
1:1

PXWH01R2XXTPB4#2

圖號 718-2XX-RL

DRAWING NO.