



SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 5 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1,500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
- Contact : Brass
- Contact Plated : Tin Plated
- Poles : 1 - 6
- Operation Temperature : - 25°C to + 85°C

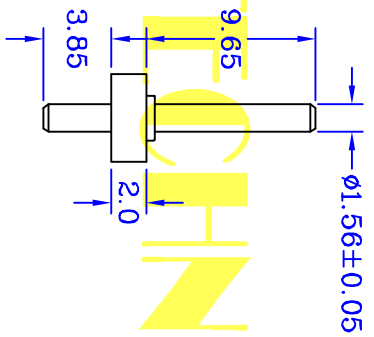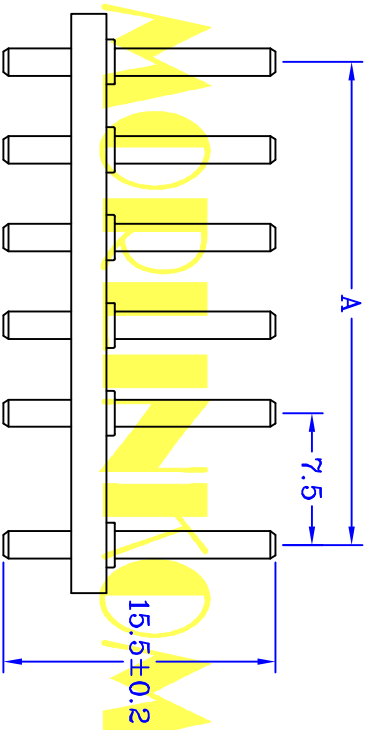

PXWE01S1X1TB4 CONTACTS	DIMENSIONS	
	A	B
01		5.50
02	7.50	13.00
03	12.50	18.00
04	17.50	23.00
05	22.50	28.00
06	27.50	33.00

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@tp6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY FUJFU	日期 DATE 2011/03/31
核對 CHECKED BY WENDY	比例 SCALE 1:1

PXWE01S1X1TB4

圖號
DRAWING NO.
700-XX-06