
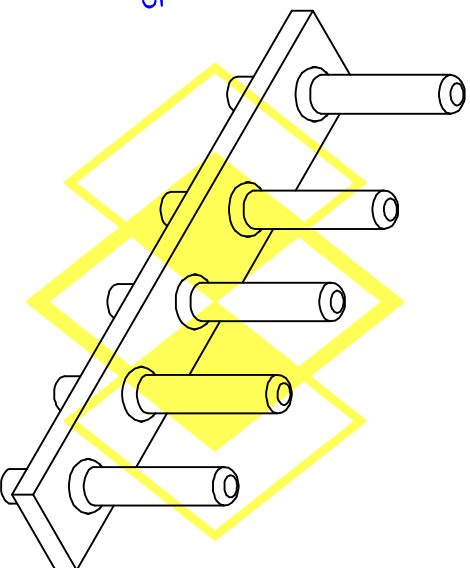


PCB LAYOUT

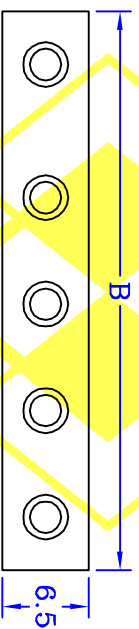



SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 7 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1,500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
- Contact : Brass
- Contact Plated : Tin Plated
- Poles : 1 - 6
- Operation Temperature : - 25°C to + 85°C

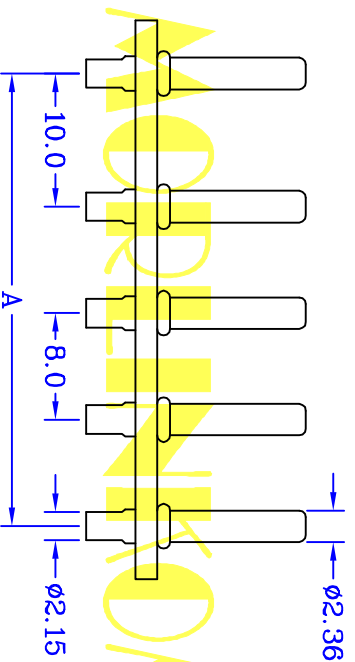

PXWFO1S1XTBI CONTACTS	DIMENSIONS	
	A	B
01	-----	6.50
02	10.0	18.00
03	18.00	26.00
04	26.00	34.00
05	34.00	42.00
06	42.00	50.00

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788

FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw

E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2011/03/31

核對 CHECKED BY

WENDY

比例 SCALE

1:1

PXWFO1S1XTBI

圖號

700-XX-05

DRAWING NO.