
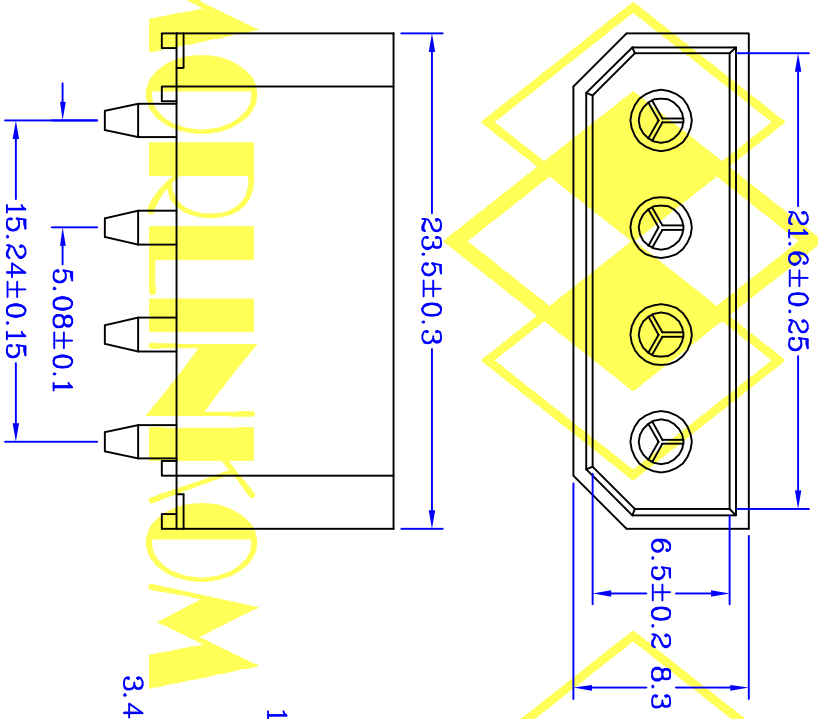


PCB LAYOUT

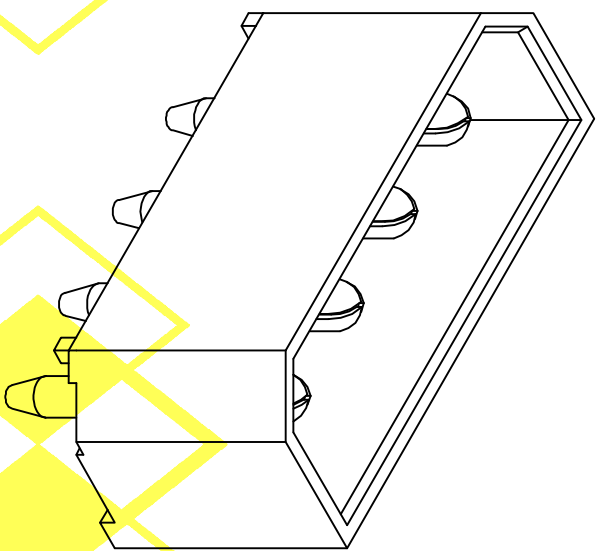

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 7 Amperes AC/DC
 - Contact Resistance : 20 mΩ Max
 - Insulator Resistance : 1000 MΩ Min
 - Di electric Withstanding Voltage : 1,500V AC RMS 60 Seconds
 - Voltage Rating : 250V AC/DC
- MATERIAL**
- Insulator : Nylon 66 UL94V-2
 - Contact : Brass , Phos. Bronze
 - Contact Plated : Tin Plated
 - Poles : 4
- Operation Temperature : - 25°C to + 85°C

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE	PXWJ02S104TB4	圖號
核對	FUFU	2011/03/31	2011/03/31		
CHECKED BY	WENDY	比例	SCALE		DRAWING NO.
		1:1			700-04-WS