
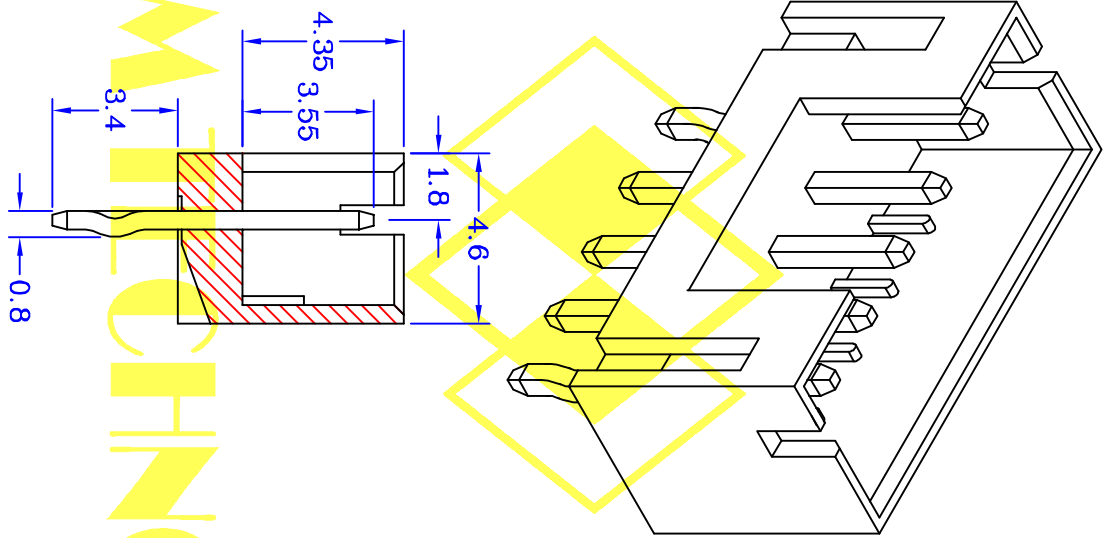


PCB LAYOUT

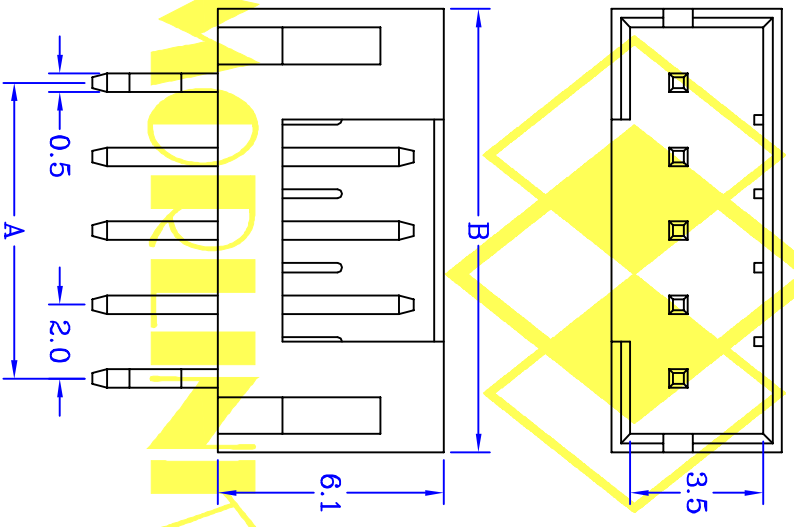

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 2 Ampere AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
- Contact : Brass
- Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

PXMA02S2XXTB9 CONTACTS	DIMENSIONS	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

UNIT: mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@tppts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY FUJFU	日期 DATE 2011/03/31
核對 CHECKED BY WENDY	比例 SCALE 1:1

PXMA02S2XXTB9

圖號
DRAWING NO.
700-XX-13