
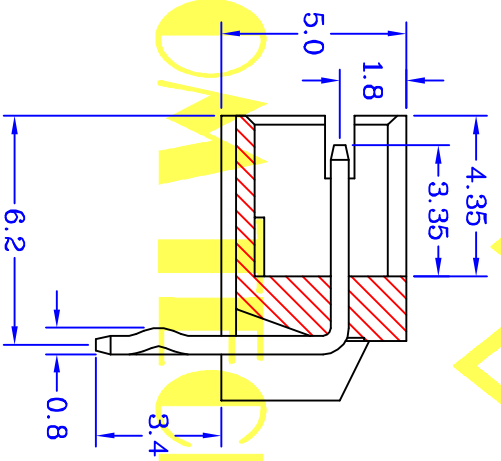
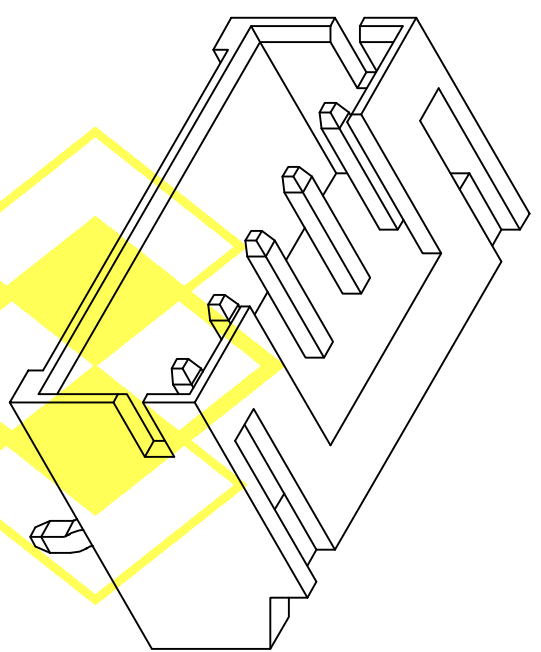
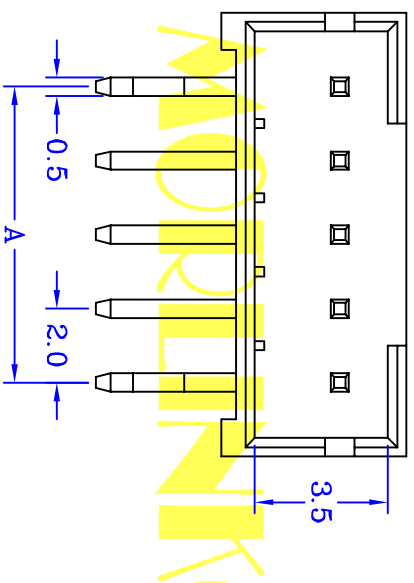


PCB LAYOUT

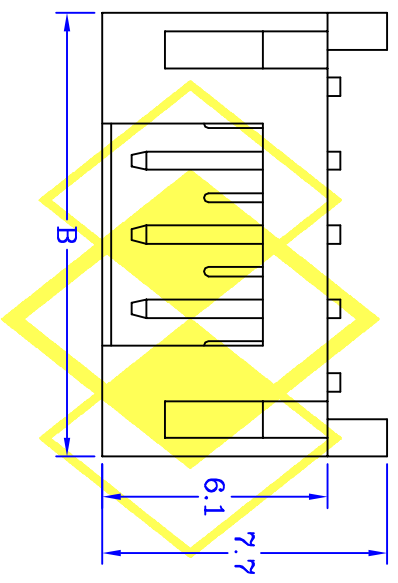

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 2 Ampere AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
  - Contact : Brass
  - Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

| PYMA02R2XXTB9 | DIMENSIONS |       |
|---------------|------------|-------|
| CONTACTS      | A          | B     |
| 02            | 2.00       | 6.00  |
| 03            | 4.00       | 8.00  |
| 04            | 6.00       | 10.00 |
| 05            | 8.00       | 12.00 |
| 06            | 10.00      | 14.00 |
| 07            | 12.00      | 16.00 |
| 08            | 14.00      | 18.00 |
| 09            | 16.00      | 20.00 |
| 10            | 18.00      | 22.00 |
| 11            | 20.00      | 24.00 |
| 12            | 22.00      | 26.00 |
| 13            | 24.00      | 28.00 |
| 14            | 26.00      | 30.00 |
| 15            | 28.00      | 32.00 |

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tppts6.seed.net.tw E-MAIL: Cen88888@gmail.com

|      |            |            |       |
|------|------------|------------|-------|
| 繪圖   | DRAWN BY   | 日期         | DATE  |
| 核對   | CHECKED BY | 比例         | SCALE |
| FUFU | WENDY      | 2011/03/31 | 1:1   |

PYMA02R2XXTB9

圖號 701-XX-13  
DRAWING NO.