


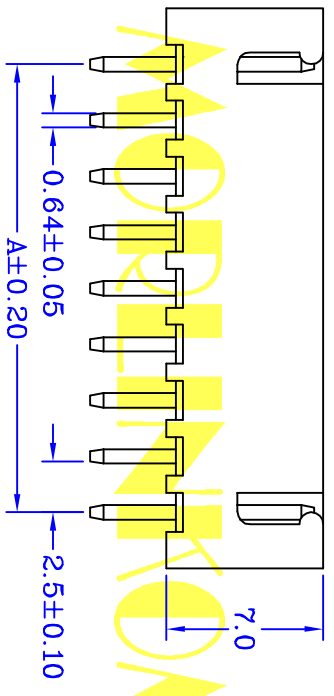


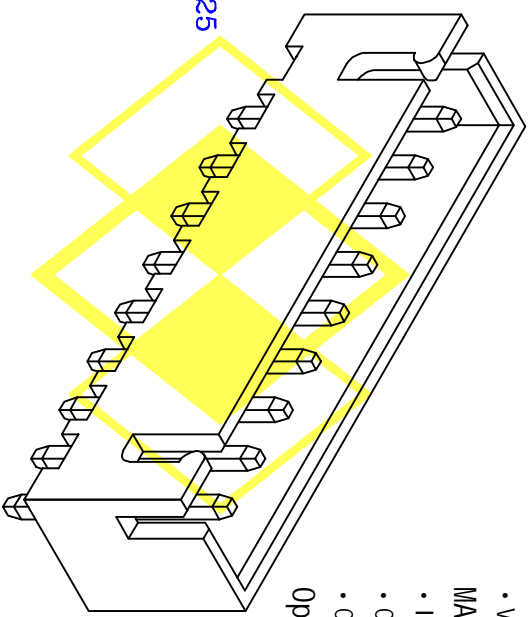

P.C.B LAYOUT

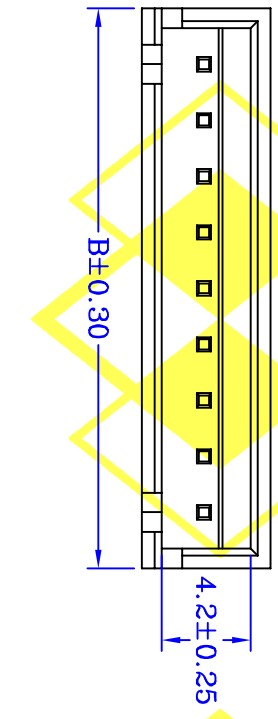

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 3 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 800V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC

MATERIAL

- Insulator : Nylon 66 UL94V-0
 - Contact : Brass
 - Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

| CONTACTS | DIMENSIONS | |
|----------|------------|------|
| | A | B |
| 2 | 2.5 | 7.5 |
| 3 | 5.0 | 10.0 |
| 4 | 7.5 | 12.5 |
| 5 | 10.0 | 15.0 |
| 6 | 12.5 | 17.5 |
| 7 | 15.0 | 20.0 |
| 8 | 17.5 | 22.5 |
| 9 | 20.0 | 25.0 |
| 10 | 22.5 | 27.5 |
| 11 | 25.0 | 30.0 |
| 12 | 27.5 | 32.5 |
| 13 | 30.0 | 35.0 |
| 14 | 32.5 | 37.5 |
| 15 | 35.0 | 40.0 |
| 16 | 37.5 | 42.5 |
| 17 | 40.0 | 45.0 |
| 18 | 42.5 | 47.5 |
| 19 | 45.0 | 50.0 |
| 20 | 47.5 | 52.5 |

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY 日期 DATE
 FUFU 2011/03/31
 核對 CHECKED BY 比例 SCALE
 WENDY 1:1

PXWB02S1XTTB4

圖號 DRAWING NO.
 700-XX-02