
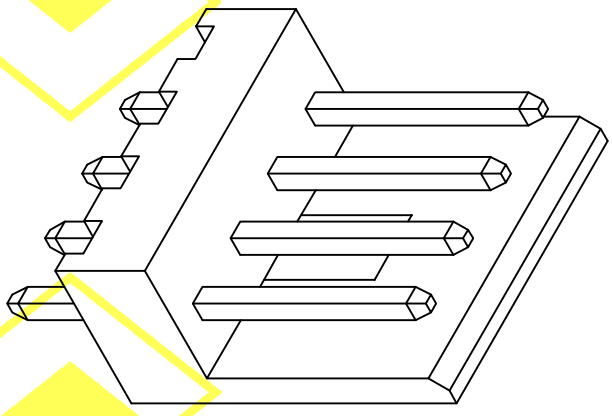
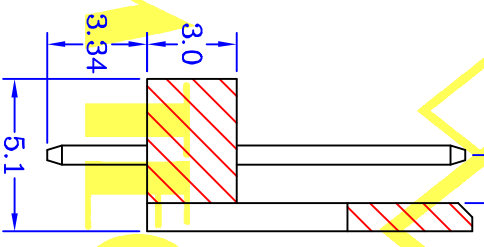
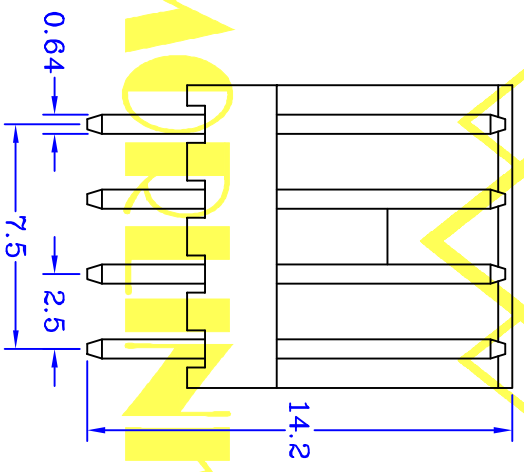


PCB LAYOUT



SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 3 Amperes AC/DC
 - Contact Resistance : 20 mΩ Max
 - Insulator Resistance : 1000 MΩ Min
 - Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds
- MATERIAL**
- Voltage Rating : 250V AC/DC
 - Insulator : Nylon 66 UL94V-0
 - Contact : Brass
 - Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

UNIT : mm

MORLINKOM TECHNOLOGY LTD.

CENTRONIC PRECISION ELECTRONIC COMPANY
 三川精密電子有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD
 魔林科技有限公司
 E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	2011/03/31	1:1

PXWB03S104TB4

圖號 700-04-1
 DRAWING NO.