

### SPECIFICATIONS

#### ELECTRICAL

- Contact Current Rating : 3 Amperes AC/DC
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 500 MΩ Min
- Dielectric Withstanding Voltage : 1,500V AC RMS 60 Seconds
- Voltage Rating : 250V AC/DC


#### MATERIAL

- Insulator : Nylon 66 UL94V-0
  - Contact : Brass
  - Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

PYMB01R1XXTB4 DIMENSIONS

CONTACTS	A	B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

UNIT : mm

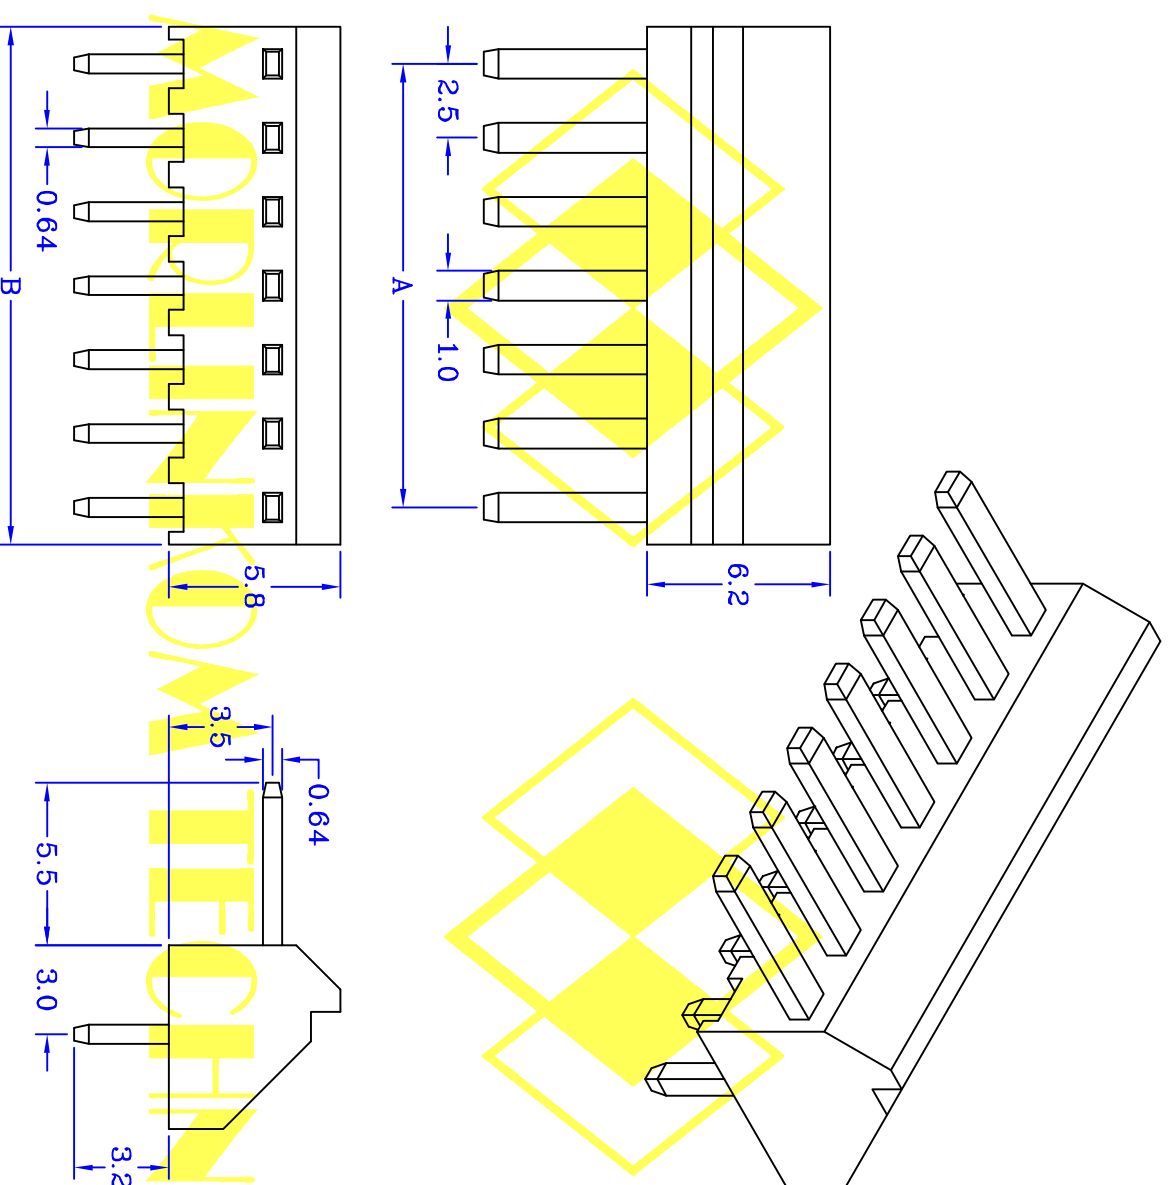

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tpnts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen88888@gmail.com

繪圖

DRAWN BY  
FUJFU

核對 CHECKED BY  
WENDY

比例 SCALE  
1:1

日期 DATE  
2011/03/31

圖號  
701-XX-02N

圖號  
DRAWING NO.

PYMB01R1XXTB4

DRAWING NO.

701-XX-02N