



# ORDERING INFORMATION

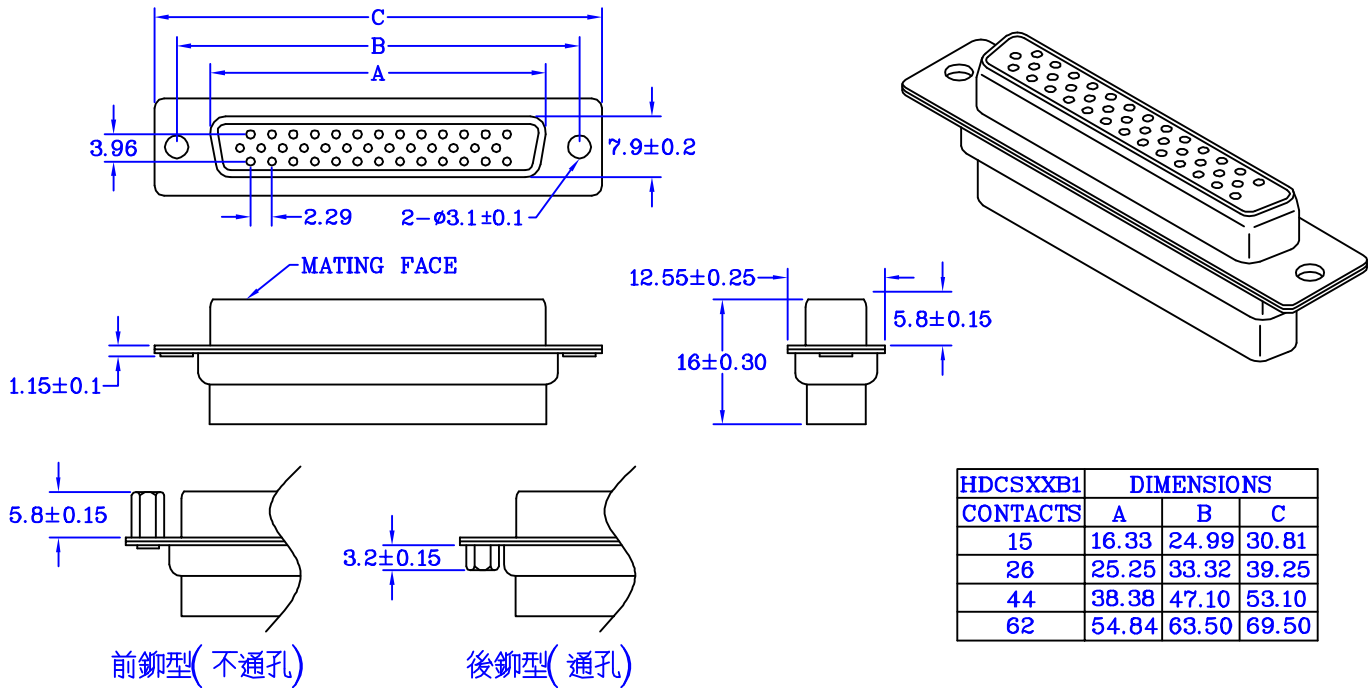

Series DC : D-SUB Crimp Housing  
HDC : High Density (Three Rows) D-Sub Crimp Housing

1. Type of Contacts P : Pin ( Male)  
S : Socket ( Female)

2. Number of Contacts DC : 9、15、25、37、50  
HDC : 15、26、44、62

3. Products Logo A : Custom-Made  
B : Without Logo (Standard)

4. Insulator Color 1 : Black  
2 : Blue  
4 : White

5. Mounting Accessories #1 : Standard fixing hole  
#2 : Front Rivet Fix Hex Nut Close Type  
#3 : Front Rivet Fix Hex Nut Through Type  
#4 : Rear Rivet Fix Hex Nut Close Type  
#5 : Rear Rivet Fix Hex Nut Through Type  
#6 : Rear Rivet Fix Boardlock

6. Hex Nut Length A : 5.8mm B : 6mm C : 4mm D : 3.2mm

EXAMPLE : HDC S 15 B 4 # 2 A  
High Density (Three Rows) D-Sub Crimp Housing  
Female 15 Pin Without Logo  
Insulator Color White  
Front Rivet Fix Hex Nut Close Type  
Hex Nut Length 5.8mm

**Morlinkom Technology Ltd.**