


ORDERING INFORMATION

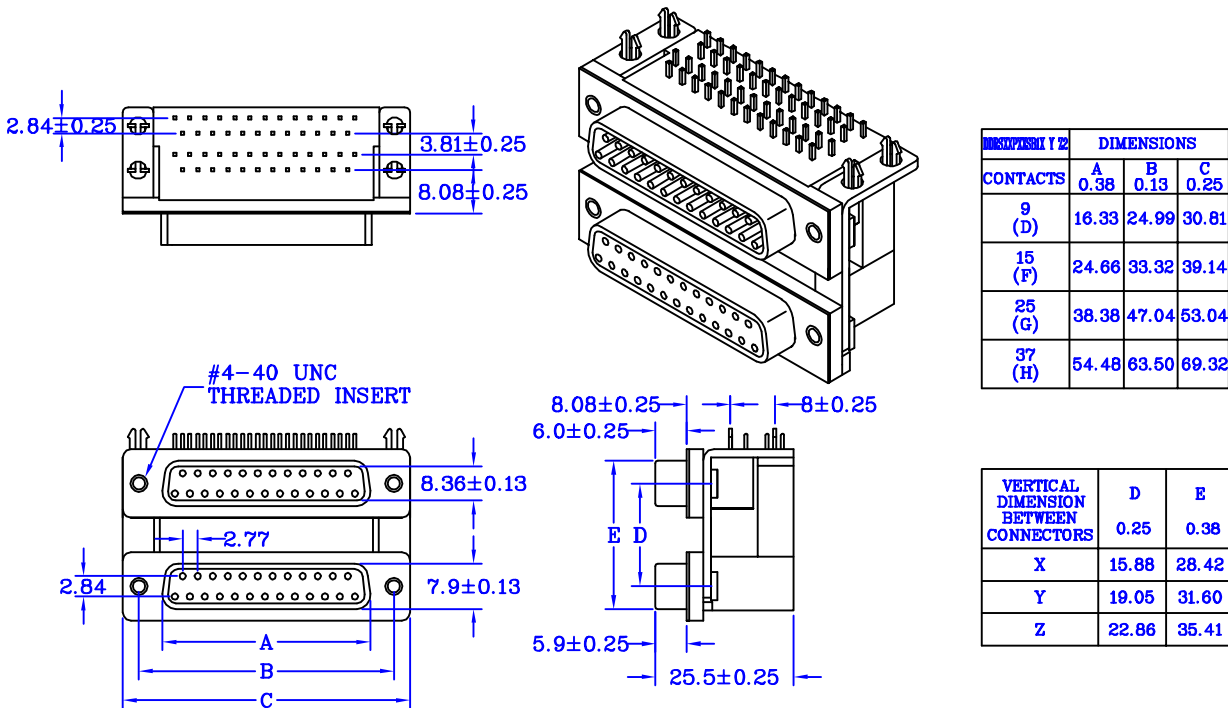

SERIES	1	2	3	4	5	6	7

- Series DDR : D-SUB. Right Angle Dual Port Connector
- 1. Type of Contacts S/P : S(Up)/P(Bottom)
P : Pin (Male) S/S : S(Up)/S(Bottom)
S : Socket (Female) P/S : P(Up)/S(Bottom)
P/P : P(Up)/P(Bottom)
- 2. Number of Contacts XX : D-SUB Right Angle : 09 15 25 37
XX(Up) / XX(Bottom) Hight Density D-SUB Right Angle : HD15 HD26 HD44
- 3. Plating Option G : Gold Plated
T : Tin Plated
S : Selective Plated(Standard)
- 4. Products Logo A : Custom-Made
B : Without Logo (Standard)
- 5. Insulator Color 1 : Black (Standard)
2 : Blue
- 6. Vertical Distance (Dimension) X 、 Y 、 Z
- 7. Mounting Method #1 : Rivet With Boardlock
#2 : Rivet With Boardlock & Screw (Accessories)
#3 : With Boardlock & Screw Fixed
#4 : Rivet With Boardlock & Screw Fixed

EXAMPLE : DDR S/P HD15/25 S B 1 X #4
D-SUB. Right Angle Dual Port Connector
Socket (Female) Up/ Pin (Male) Bottom
Hight Density Female 15 PIN(Up)/ Male 25 Pin(Bottom)
Selective Plated (Gold/Tin) Without Logo
Insulator Color Black Dimension D=15.88mm E=28.42mm
Rivet With Boardlock & Screw Fixed