


# ORDERING INFORMATION

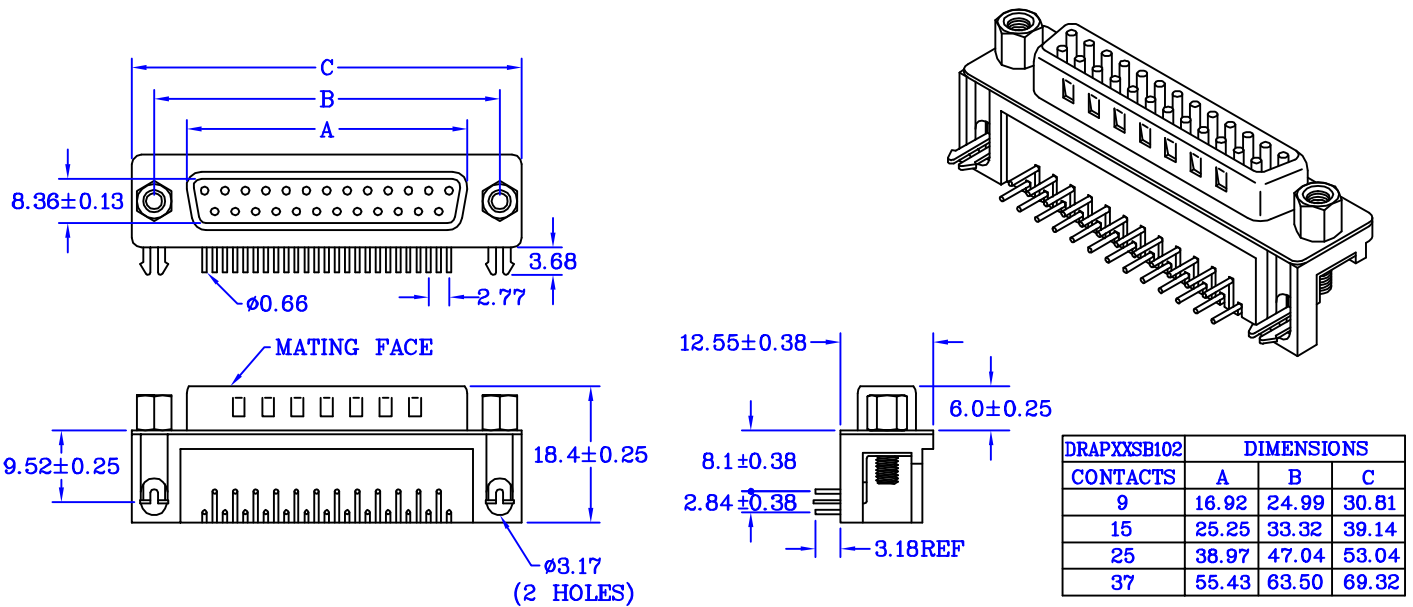

SERIES	1	2	3	4	5	6	7

- Series DR : D-SUB. Right Angle Connector  
HDR : High Density D-SUB. Right Angle Connector
1. Plastic depth : A : 8.1mm B : 9.4mm C : 13.84mm D : 8.89mm  
E : 3.08mm F : 5.08mm G: 1.2mm
2. Type of Contact P : Pin ( Male)  
S : Socket ( Female)
3. Number of Contacts DR : 9、15、25、37  
HDR : 15、26、44、62
4. Plating Option G : Gold Plated  
T : Tin Plated  
S : Selective Plated( Standard )
5. Products Logo A : Custom-Made  
B : Without Logo ( Standard )
6. Insulator Color 1 : Black ( Standard )  
2 : Blue
7. Hex Nut Length #1 : Rivet With Boardlock  
#2 : Rivet With Boardlock & Screw ( Accessories)  
#3 : With Boardlock & Screw Fixed  
#4 : Rivet With Boardlock & Screw Fixed  
#5 : Rivet With Boardlock & Screw (crosscutting Type) Fixed

EXAMPLE : DR A P 25 S B 1 #4  
D-SUB. Right Angle Connector  
Plastic depth 8.1mm Male 25 Pin  
Selective Plated (Gold/Tin) Without Logo  
Insulator Color Black  
Rivet With Boardlock & Screw Fixed

**Mbrlinkom Technology Ltd.**