



ORDERING INFORMATION

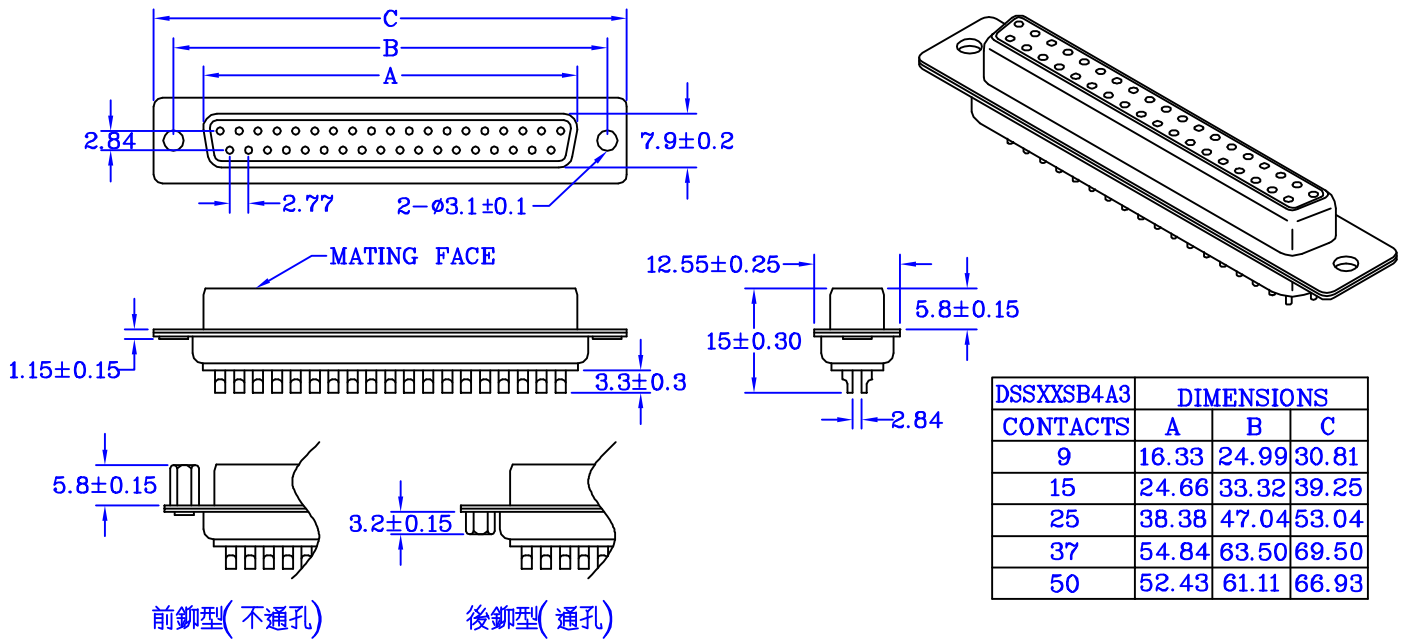

DSSXXSB4A3 CONTACTS	DIMENSIONS		
	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.25
25	38.38	47.04	53.04
37	54.84	63.50	69.50
50	52.43	61.11	66.93



- Series DP : D-SUB Straight PCB Dip Connector
 DS : D-SUB Solder Type Connector
 HDP : High Density(Three Rows) D-SUB Straight PCB Dip Connector
 HDS : High Density(Three Rows) D-SUB Solder Type Connector
1. Type of Contacts P : Pin (Male)
 S : Socket (Female)
2. Number of Contacts 9、15、25、37、50 (DP、DS)
 15、26、44、62 (HDP、HDS)
3. Plating Option G : Gold Plated
 T : Tin Plated
 S : Selective Plated
4. Products Logo A : Custom-Made
 B : Without Logo (Standard)
5. Insulator Color 1 : Black
 2 : Blue
 4 : White
6. Mounting Accessories #1 : Standard fixing hole
 #2 : Front Rivet Fix Hex Nut Close Type
 #3 : Front Rivet Fix Hex Nut Through Type
 #4 : Rear Rivet Fix Hex Nut Close Type
 #5 : Rear Rivet Fix Hex Nut Through Type
 #6 : Rear Rivet Fix Boardlock
7. Hex Nut Length A : 5.8mm B : 6mm C : 4mm D : 3.2mm
 E : 10.4mm F : 9.4mm

EXAMPLE : DS S 25 S B 4 #2 A
 D-SUB Solder Type Connector
 Female 25 Pin
 Selective Plated (Gold/Tin) Without Logo
 Insulator Color White
 Front Rivet Fix Hex Nut Close Type
 Hex Nut Length 5.8mm

Mbrlinkom Technology Ltd.