


## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 5 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds
- Rated Voltage : 250V DC

### MATERIAL

- Insulator : PBT UL 94V-0
  - Contact : Brass
  - Contact Plated : Gold / Tin Selective Plated
  - Board Lock : Copper Alloy , Tin Plated
  - Square Rivet : Copper Alloy , Nickel Plated
  - Shell : Steel , Nickel Plated
  - Shell Bracket : Brass , Nickel Plated
- Operation Temperature : - 40°C to + 105°C

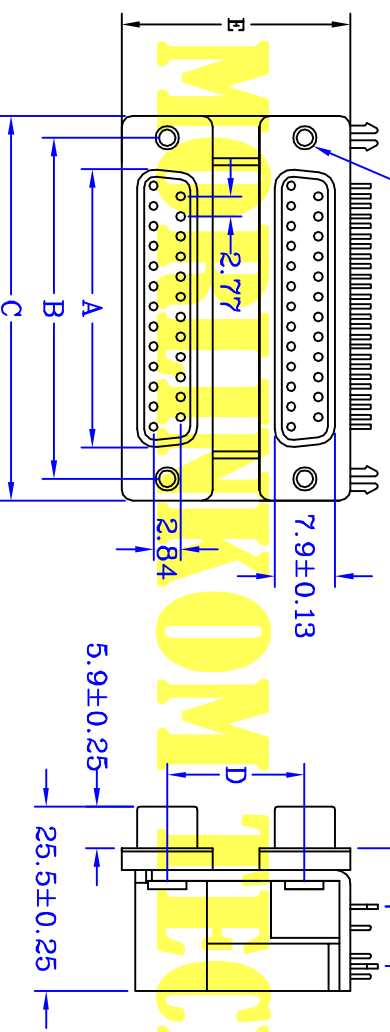

DDPSKSYK Y Z	DIMENSIONS		
	A	B	C
CONTACTS	0.38	0.13	0.25
9 (D)	16.33	24.99	30.81
15 (F)	24.66	33.32	39.14
25 (G)	38.38	47.04	53.04
37 (H)	54.48	63.50	69.32

VERTICAL DIMENSION BETWEEN CONNECTORS	D		E	
	X	Y	X	Y
X	15.88	28.42	0.38	0.38
Y	19.05	31.60	0.25	0.25
Z	22.86	35.41	0.25	0.25

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY  
 三川精密電子有限公司  
 MORLINKOM TECHNOLOGY LTD  
 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY  
 FUFU  
 核對 CHECKED BY  
 WENDY

日期 DATE  
 2011/11/29  
 比例 SCALE  
 1:1

DDPSKSYKSBIX Y Z

圖號 369-XXC-X/Y/Z  
 DRAWING NO.