
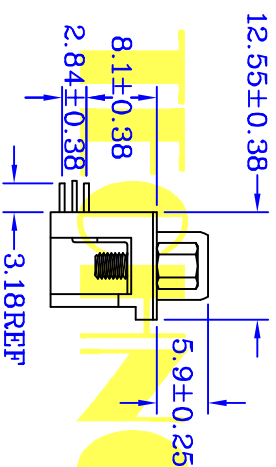


- SPECIFICATIONS**
- ELECTRICAL**
- Contact Current Rating : 5 Ampere
  - Contact Resistance : 25 mΩ Max
  - Insulator Resistance : 1,000 MΩ Min
  - Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : PBT UL 94V-0
  - Contact : Brass
  - Contact Plated : Gold Plated OR Tin Plated
  - Shell : Steel
  - Shell Plated : Nickel Plated
  - Screw : Brass
  - Screw Plated : Nickel Plated
- Operation Temperature : - 40°C to + 105°C

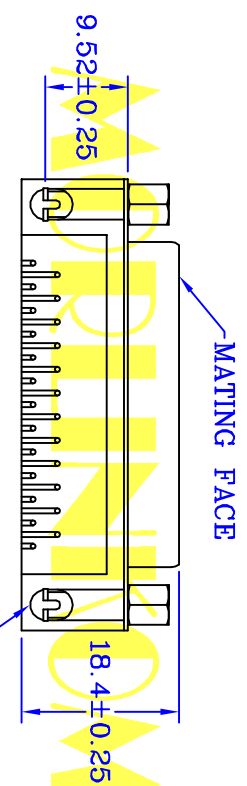

DRASXXSB1#3	DIMENSIONS		
CONTACTS	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpsts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY 日期 DATE  
 FUFU 2011/03/29  
 核對 CHECKED BY 比例 SCALE  
 WENDY 1:1

**DRASXXSB1#3**

圖號 361-XX-10  
 DRAWING NO.