



**SPECIFICATIONS**  
**ELECTRICAL**

- Contact Current Rating : 5 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min

• Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : PBT UL 94V-0
  - Contact : Brass
  - Contact Plated : Gold Plated OR Tin Plated
  - Shell : Steel
  - Shell Plated : Nickel Plated
  - Screw : Brass
  - Screw Plated : Nickel Plated
- Operation Temperature : - 40°C to + 105°C

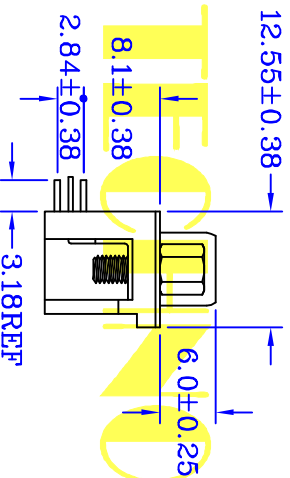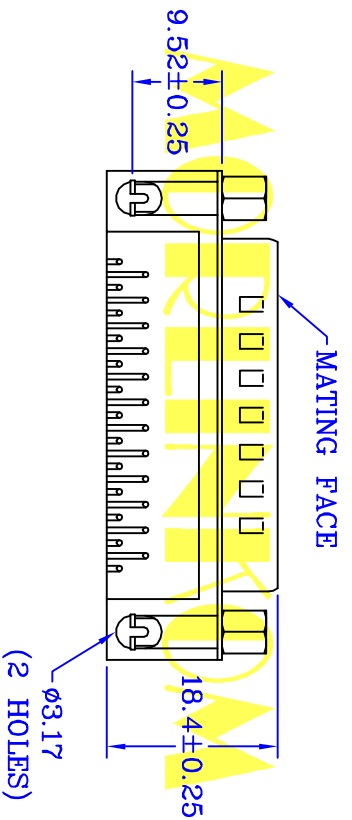

DRAPXXSB1#3 CONTACTS	DIMENSIONS		
	A	B	C
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.97	47.04	53.04
37	55.43	63.50	69.32

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpst6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY FUJFU  
核對 CHECKED BY WENDY

日期 DATE 2011/03/29  
比例 SCALE 1:1

**DRAPXXSB1#3**

圖號 371-XX-10  
DRAWING NO.