


**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 5 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Di electric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Gold Plated OR Tin Plated
- Shell : Steel
- Shell Plated : Nickel Plated
- Screw : Brass
- Screw Plated : Nickel Plated
- Operation Temperature : - 40°C to + 105°C

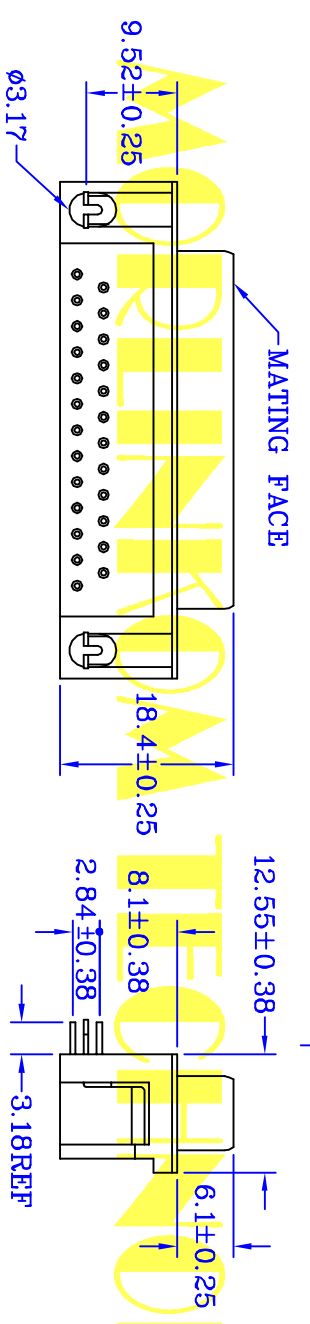

DRASXXSBI#2	DIMENSIONS		
CONTACTS	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

UNIT : mm

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

**DRASXXSBI#2**

圖號 361-XX-11  
 DRAWING NO.