



**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 5 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Gold Plated OR Tin Plated
- Shell : Steel
- Shell Plated : Nickel Plated
- Screw : Brass
- Screw Plated : Nickel Plated
- Operation Temperature : - 40°C to + 105°C

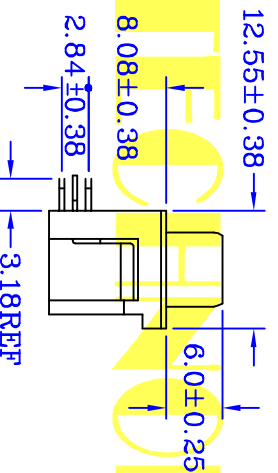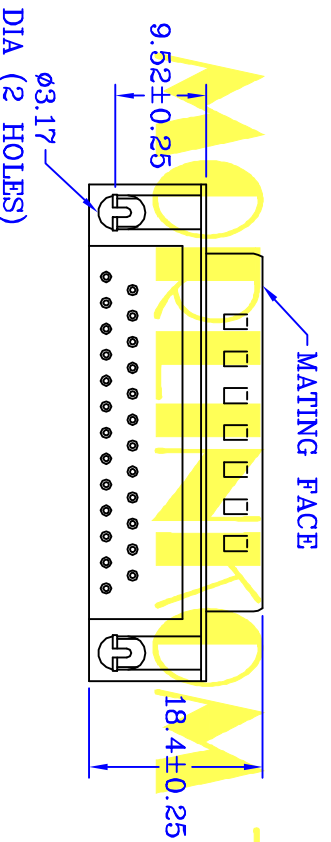

DRAPXXSB1#2	DIMENSIONS		
CONTACTS	A	B	C
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.97	47.04	53.04
37	55.43	63.50	69.32

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2011/03/29

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAPXXSB1#2

圖號

371-XX-11

DRAWING NO.