

SPECIFICATIONS

ELECTRICAL


- Contact Current Rating : 2 Ampere
- Contact Resistance : 15 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL94V-0.
- Contact : Brass
- Contact Plated : Gold Plated , Selective Gold Over Nickel
- Shell : Steel
- Shell Plated : Nickel Plated
- Screw : Brass
- Screw Plated : Nickel Plated

Operation Temperature : -40°C to +105°C

UNIT: mm

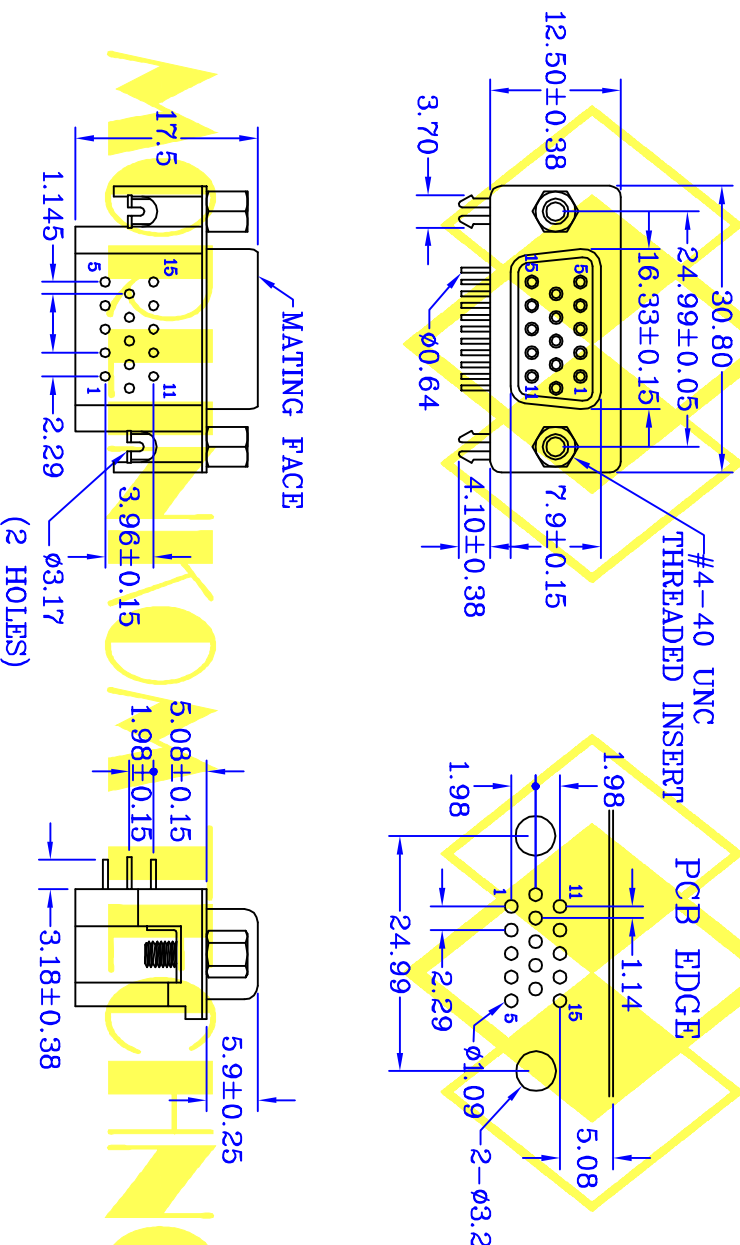

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2011/03/30

核對 CHECKED BY

WENDY

比例 SCALE

1:1

圖號 541-15-18

DRAWING NO.

HDRFSXXSB2#3

DRAWING NO.