
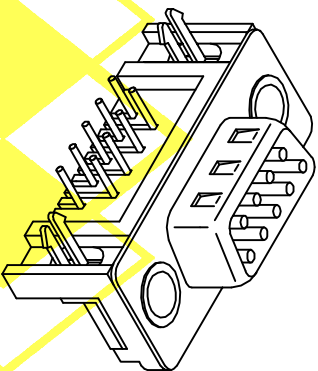


## PCB LAYOUT

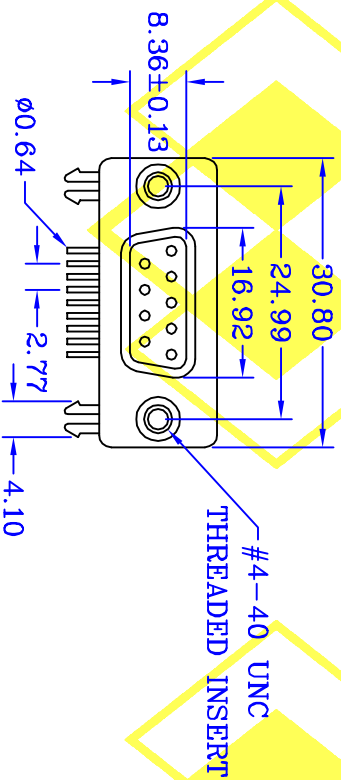

## SPECIFICATION


### ELECTRICAL

- Contact Current Rating : 5 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

### MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Gold Plated 0R Tin Plated
- Shell : Steel
- Shell Plated : Nickel Plated

Operation Temperature : - 40°C to + 105°C

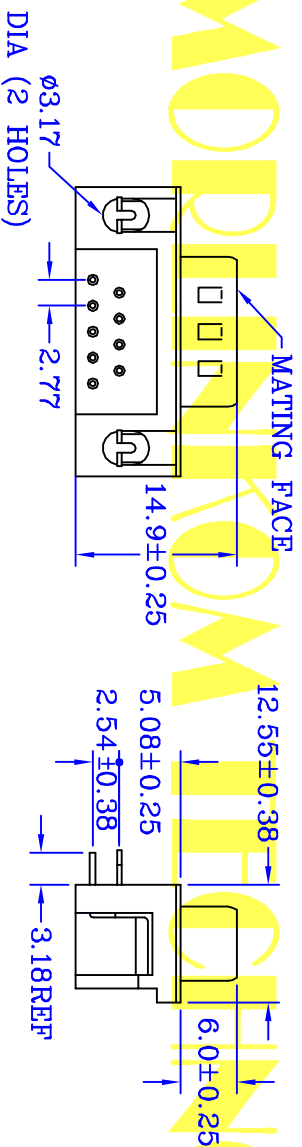

UNIT : mm

# MORLINTON TECHNOLOGY LTD.

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINTON TECHNOLOGY LTD

魔林科技有限公司

E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	2011/03/29	1:1

DRFP09GB1#1

圖號 371-09-16  
DRAWING NO.