
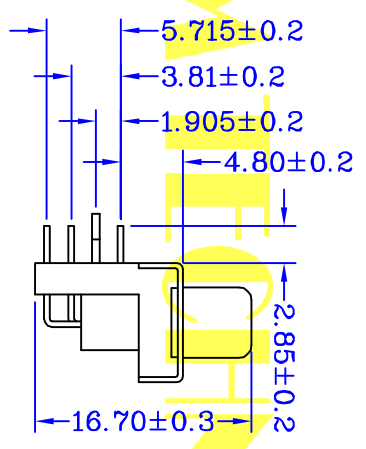


PC Board Mounting Dimensions

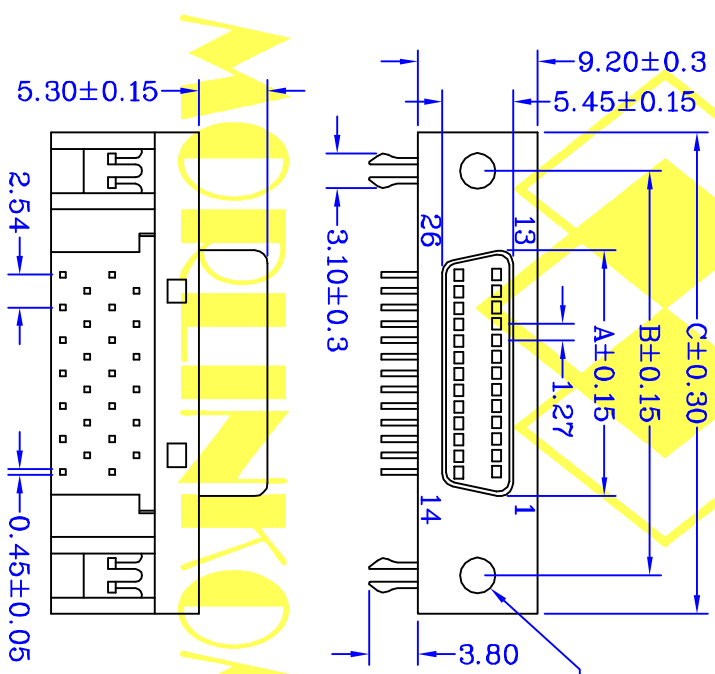

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Amperre
- Contact Resistance : 35 mΩ Max
- Insulator Resistance : 500 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Gold / Tin Selective Plated
- Board Lock : Brass , Tin Plated

- Shell : Steel , Nickel Plated Over Copper
- Operation Temperature : - 20°C to + 85°C

CONTACTS	DIMENSIONS				
	A	B	C	D	E
26	19.45	31.26	37.19	15.24	31.26
40	28.25	40.15	46.30	24.13	40.15
50	34.70	46.50	52.43	30.48	46.50
68	46.13	57.93	63.86	41.91	57.93

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY
FU-FU
核對 CHECKED BY
WENDY

日期 DATE
2011/03/30
比例 SCALE
1:1

SCSIDRXXSBI

圖號 545-XX
DRAWING NO.