
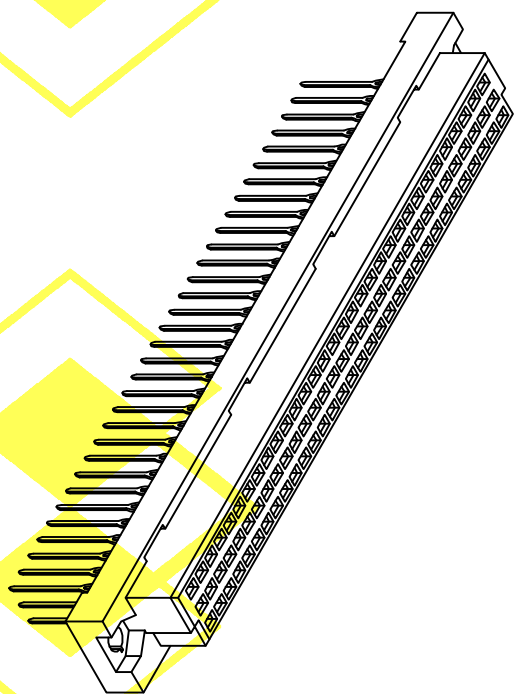



PCB LAYOUT

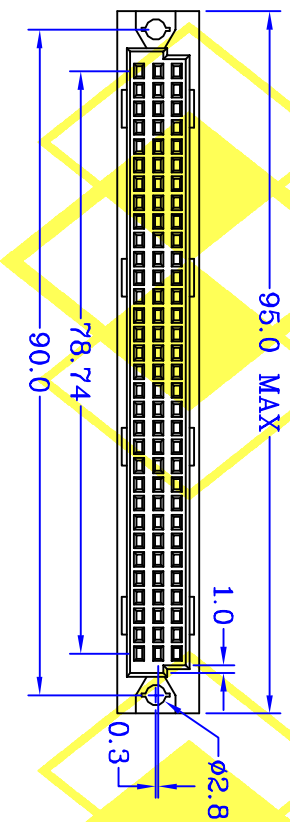

SPECIFICATIONS  
ELECTRICAL

- Contact Current Rating : 2 Amperes
  - Contact Resistance : 30 mΩ Max
  - Insulator Resistance : 1000 MΩ Min
  - Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : PBT UL 94V-0
  - Contact : Phosphor Bronze
  - Contact Plated : Selective Plated ( Dip Tin + Contact Gold )
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

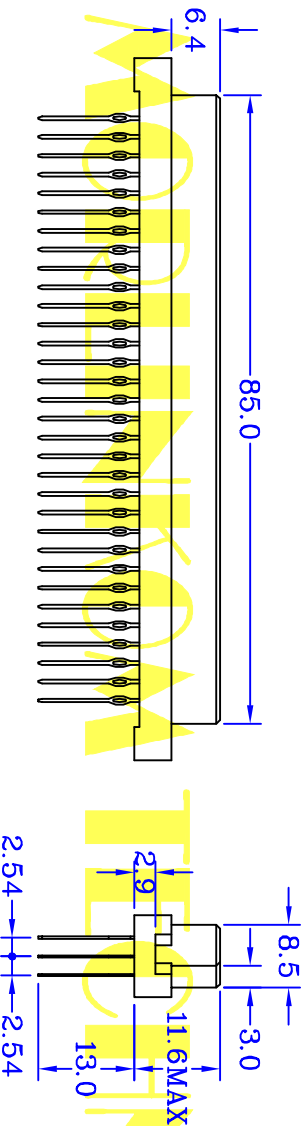

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY  
FU FU

日期 DATE  
2011/02/21

核對 CHECKED BY  
WENDY

比例 SCALE  
1:1

DINSS3961B4L01

圖號 995-96S-C13  
DRAWING NO.