
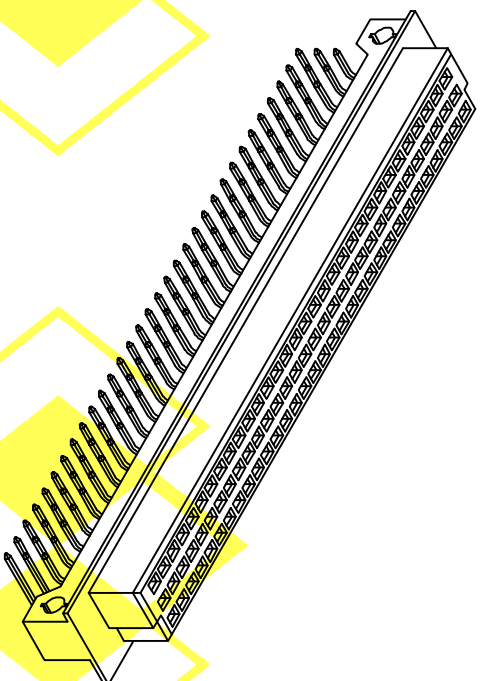
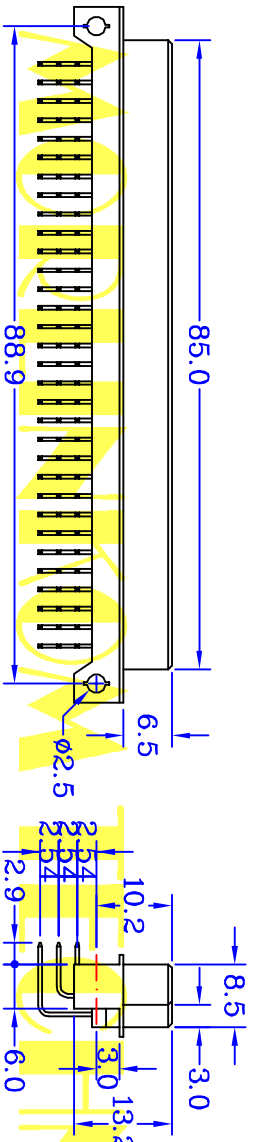


## PCB LAYOUT

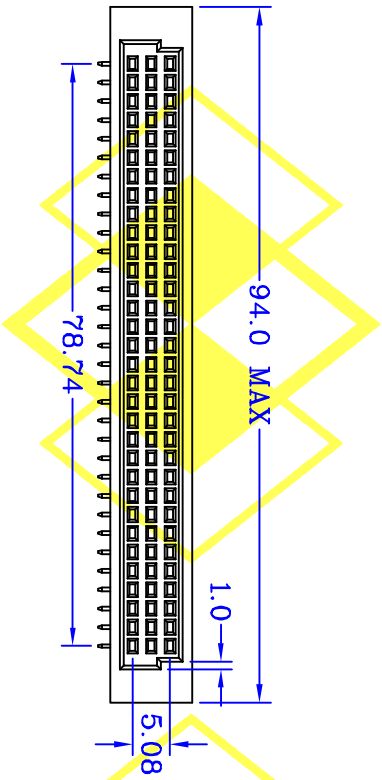

## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

### MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Selective Plated ( Dip Tin , Contact Gold )

Operation Temperature : - 55°C to + 105°C

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@ipts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2010/07/08

DINRS396TB4

圖號 995-96S-R

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAWING NO.