
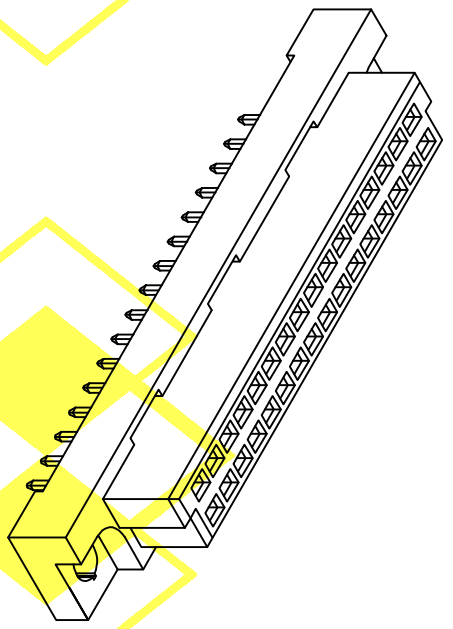
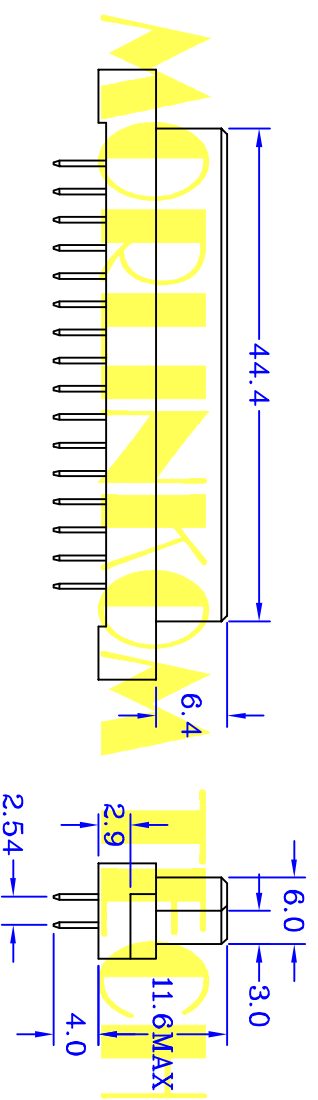


PCB LAYOUT

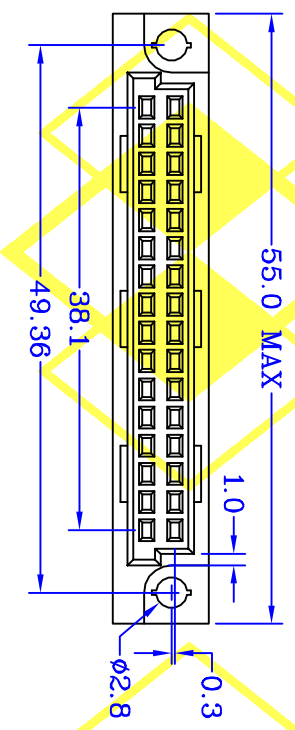


SPECIFICATIONS ELECTRICAL

- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

- MATERIAL**
- Insulator : PBT UL 94V-0
 - Contact : Phosphor Bronze
 - Contact Plated : Selective Plated (Dip Tin + Contact Gold)
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

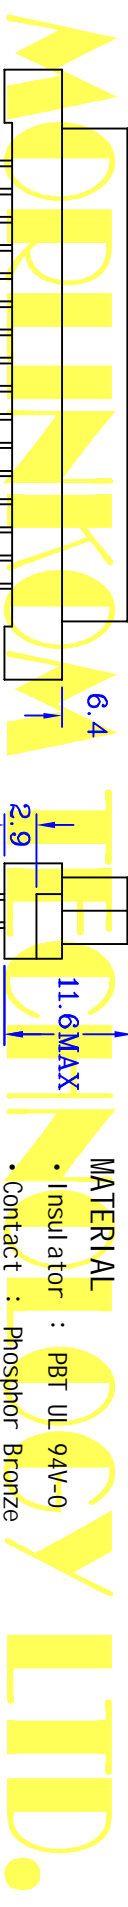

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:866-2-2686-0018
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	2010/07/14	1:1

DINSS232TB4

圖號 995-32S-0
 DRAWING NO.