
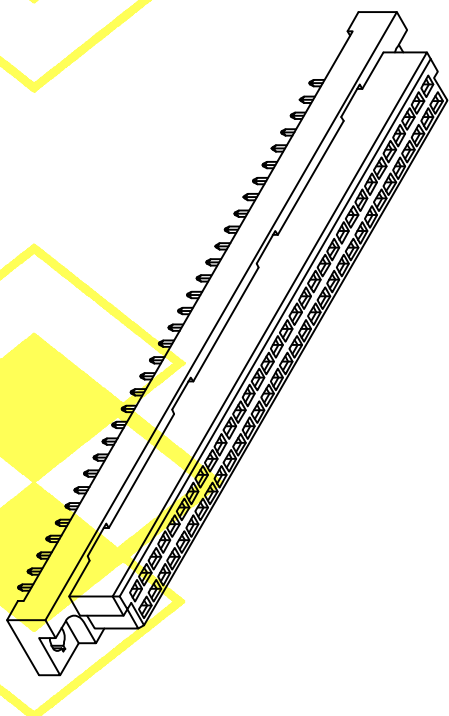
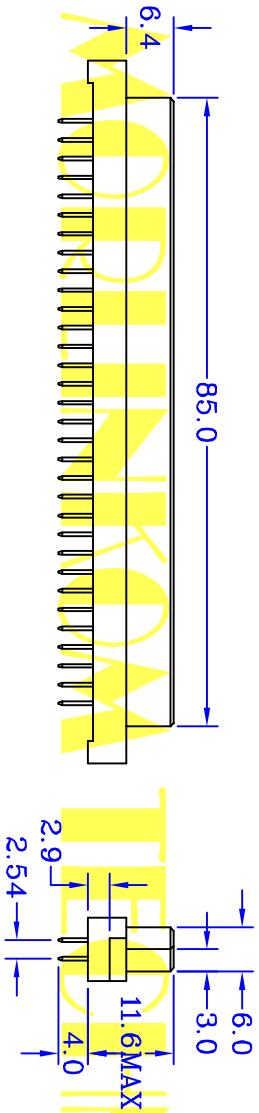


PCB LAYOUT

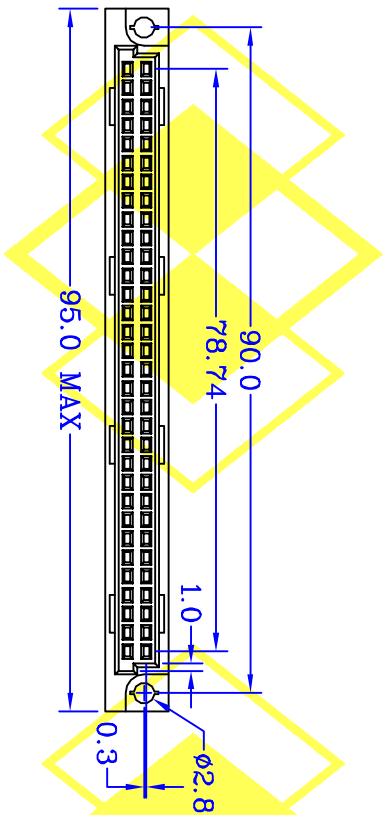

SPECIFICATIONS
ELECTRICAL

- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
 - Contact : Phosphor Bronze
 - Contact Plated : Selective Plated (Dip Tin + Contact Gold)
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@ipts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

DINSS264TB4

圖號 995-64S-B
DRAWING NO. 995-264S-S