
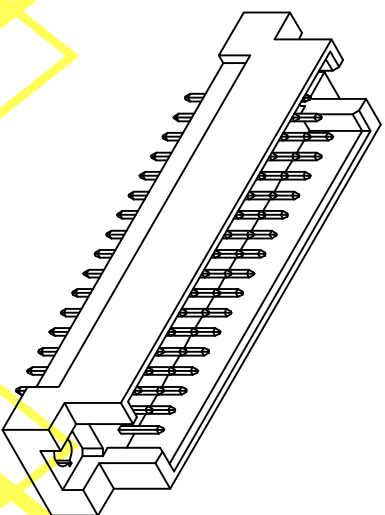


PCB LAYOUT

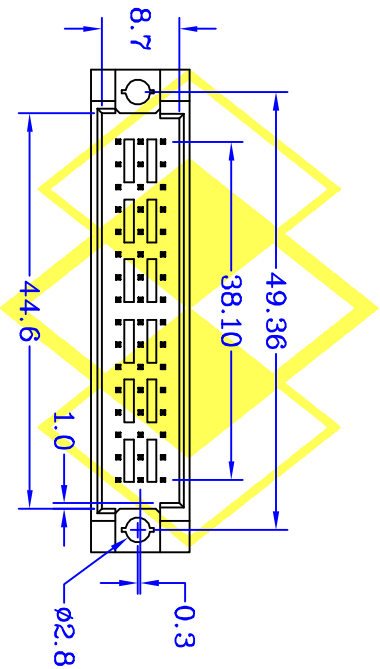

SPECIFICATIONS
ELECTRICAL



- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Brass

- Contact Plated : Selective Plated (Dip Tin , Contact Gold)
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

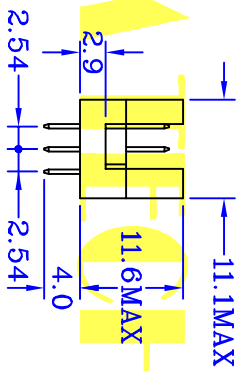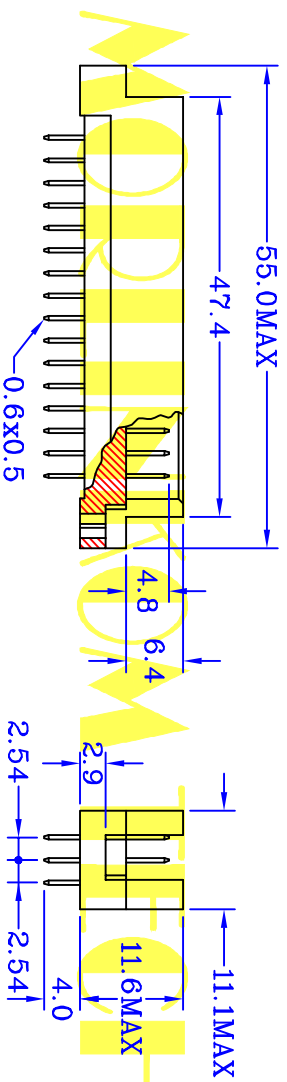

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@ipts6.secd.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY
FUJFU

日期 DATE
2010/06/22

核對 CHECKED BY
WENDY

比例 SCALE
1:1

DINSP348TB4

圖號 995-48P-S
DRAWING NO.