
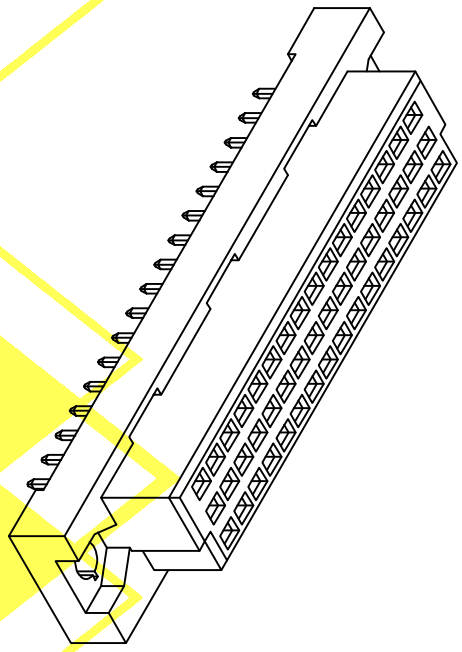


PCB LAYOUT

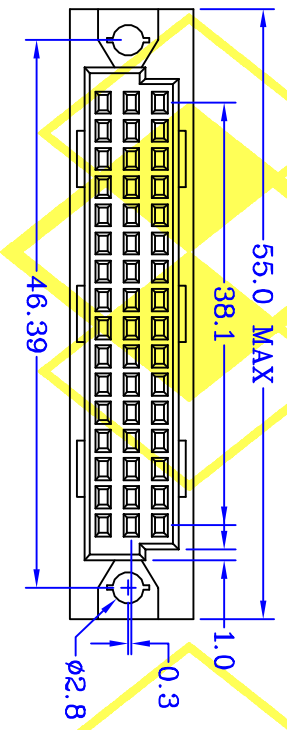

SPECIFICATIONS  
ELECTRICAL



- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Phosphor Bronze

- Contact Plated : Selective Plated ( Dip Tin + Contact Gold )
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

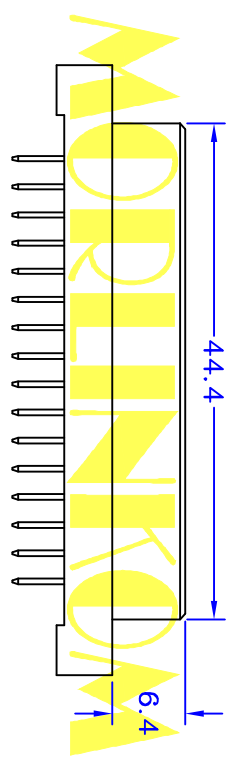

**MORLINKOM LTD.**

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:866-2-2686-0018  
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	FUFU	2010/07/14	
CHECKED BY	WENDY	比例	SCALE
		1:1	

**DINSS348TB4**

圖號 995-48S-C  
 DRAWING NO. 995-48S-S