


P.C.B LAYOUT

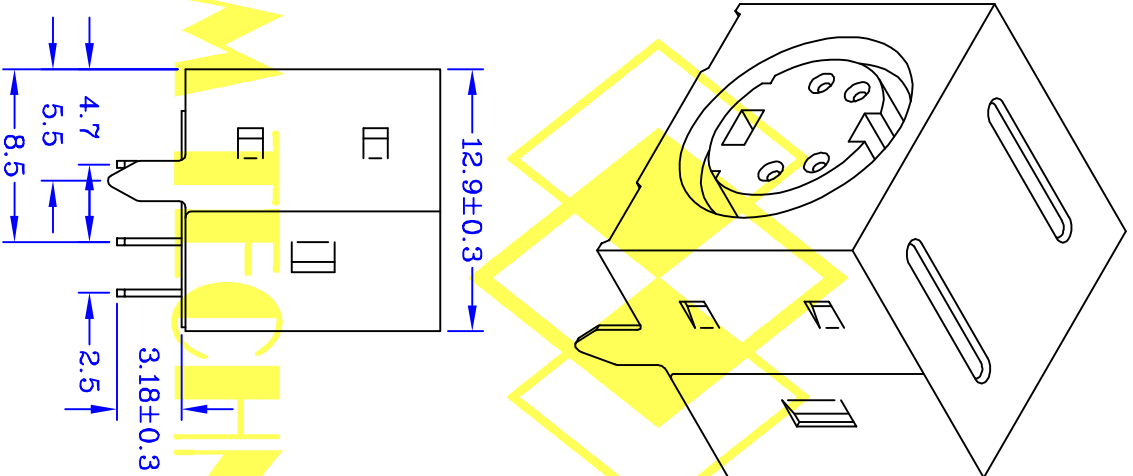

## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 500 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

### MATERIAL

- Insulator : PBT UL94V-0
  - Contact : Phosphor Bronze
  - Contact Plated : Gold / Tin Plated Selective Plated
  - Shield : Brass , Tin Plated
- Operating Temperature : -55°C ~ +105°C

UNIT : mm

MDNS04TBIM TECHNOLOGY LTD.

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tpts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖  
DRAWN BY  
FUJFU

日期  
DATE  
2009/02/12

核對  
CHECKED BY  
WENDY

比例  
SCALE  
1:1

圖號  
DRAWING NO.  
733-04-M