


SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 0.5 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 500 MΩ Min
- Di electric Withstanding Voltage : 200 V AC RMS 60 Seconds
- Voltage Rating : 50 V

MATERIAL

- Insulator : LCP6807, Cover : LCP6130
 - Contact : Phosphor Bronze
 - Plated : Gold Plated, Tin Plated, Selective Plated
- Operation Temperature : - 25°C to + 85°C

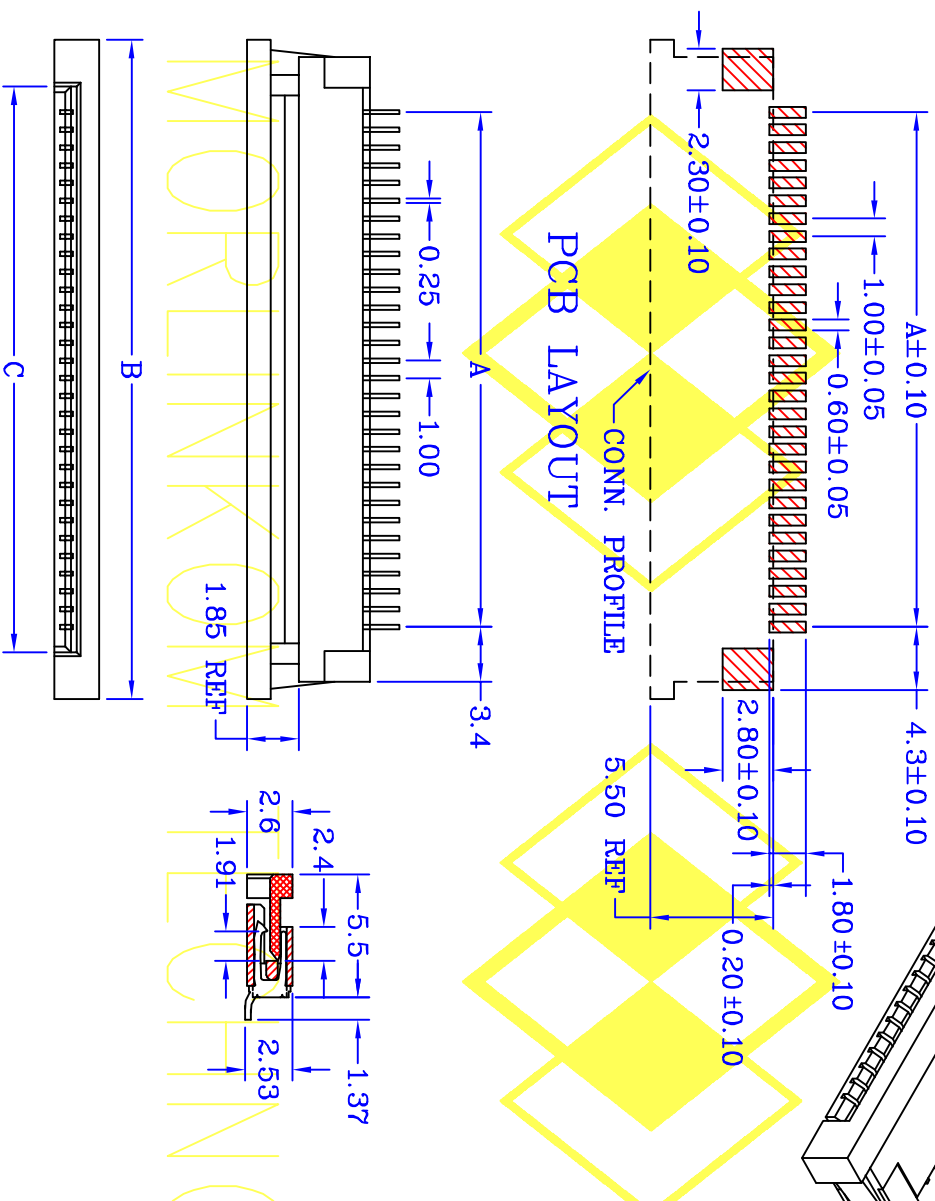

CONTACTS	DIMENSIONS			CONTACTS	DIMENSIONS		
	A	B	C		A	B	C
1	3.00	11.00	5.25	20	19.00	27.00	21.25
2	4.00	12.00	6.25	21	20.00	28.00	22.25
3	5.00	13.00	7.25	22	21.00	29.00	23.25
4	6.00	14.00	8.25	23	22.00	30.00	24.25
5	7.00	15.00	9.25	24	23.00	31.00	25.25
6	8.00	16.00	10.25	25	24.00	32.00	26.25
7	9.00	17.00	11.25	26	25.00	33.00	27.25
8	10.00	18.00	12.25	27	26.00	34.00	28.25
9	11.00	19.00	13.25	28	27.00	35.00	29.25
10	12.00	20.00	14.25	29	28.00	36.00	30.25
11	13.00	21.00	15.25	30	29.00	37.00	31.25
12	14.00	22.00	16.25				
13	15.00	23.00	17.25				
14	16.00	24.00	18.25				
15	17.00	25.00	19.25				
16	18.00	26.00	20.25				
17							
18							
19							

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖

DRAWN BY
FUJFU

核對 CHECKED BY
WENDY

日期 DATE
2012/08/28

比例 SCALE
1:1

1.0PCCRXTBASD

圖號

763-XXR-SD

DRAWING NO.