


## SPECIFICATIONS

### ELECTRICAL




- Contact Current Rating : 2 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : AC 500 V RMS 60 Seconds

### MATERIAL

- Insulator : Nylon-6T
  - Contact : Brass
  - Contact Plated : Gold Plated (Standard)
- Operation Temperature : - 40°C to + 105°C

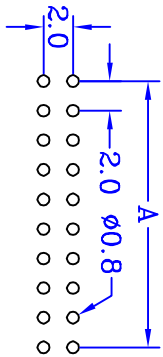

PCB LAYOUT

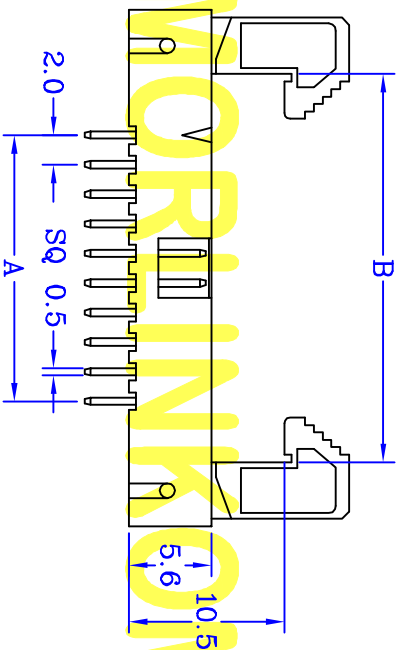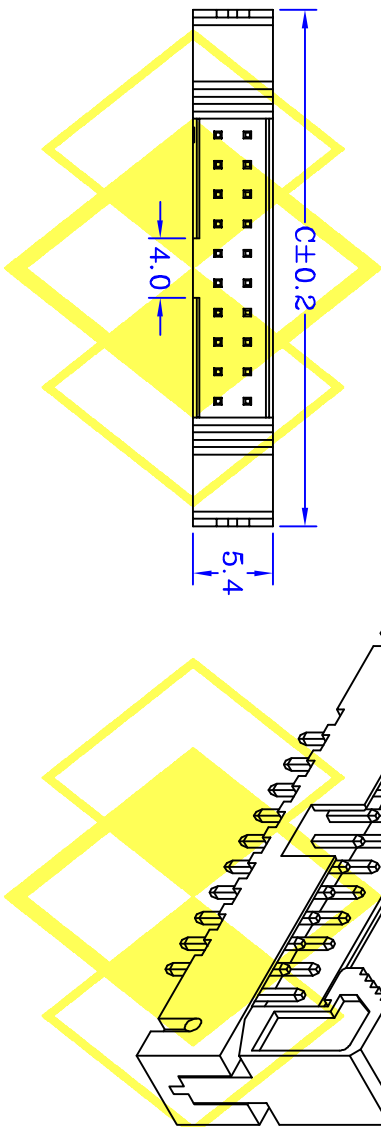

HHCXXGB101 CONTACTS	DIMENSIONS		
	A	B	C
10	8.00	16.25	24.90
12	10.00	18.25	26.90
14	12.00	20.25	28.90
16	14.00	22.25	30.90
20	18.00	26.25	34.90
22	20.00	28.25	36.90
24	22.00	30.25	38.90
26	24.00	32.25	40.90
30	28.00	36.25	44.90
32	30.00	38.25	46.90
34	32.00	40.25	48.90
40	38.00	46.25	54.90
44	42.00	50.25	58.90
50	48.00	56.25	64.90
60	58.00	66.25	74.90

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:866-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2009/12/23

核對 CHECKED BY

WENDY

比例 SCALE

1:1

HHCXXGB101

圖號

315-XX-01

DRAWING NO.