


2.54 ± 0.05

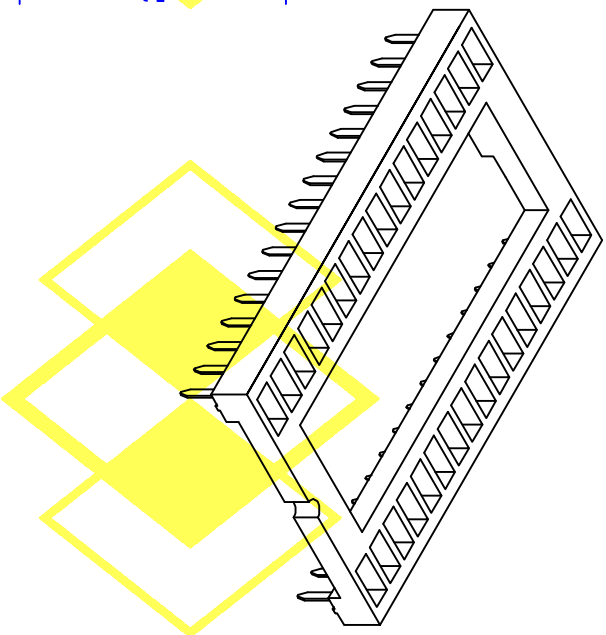

SPECIFICATIONS

ELECTRICAL


- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 50 g Min / Pin

MATERIAL

- Insulator : PBT, UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

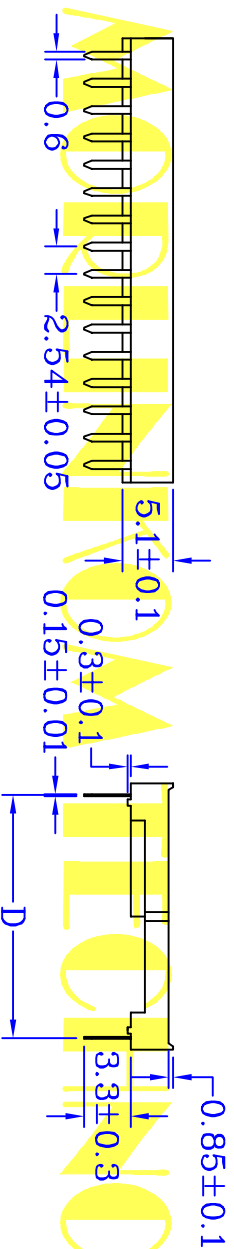

ICSAXTBIBB	DIMENSION			
	CONTACTS	A ^{+0.10} _{-0.10}	B ^{+0.12} _{-0.12}	C ^{+0.15} _{-0.15} D ^{+0.30} _{-0.30}
24	27.94	30.38		
28	33.02	35.46	17.68	15.24
32	38.10	40.54		
40	48.26	50.70		

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen88888@gmail.com

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

繪圖 DRAWN BY

FUFU

日期 DATE

2008/12/15

ICSAXTBIBB

圖號

00-XX-01

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAWING NO.