

## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min


• Di electric Withstanding Voltage : 1,000V AC RMS 60 Seconds

### MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 50 g Min / Pin

### MATERIAL

- Insulator : PBT, UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

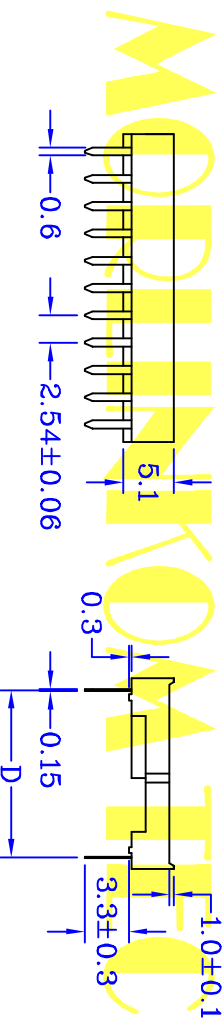

ICSAXXTB1BC	DIMENSION			
	CONTACTS	A <sup>+0.10</sup> <sub>-0.10</sub>	B <sup>+0.12</sup> <sub>-0.12</sub>	C <sup>+0.15</sup> <sub>-0.15</sub> D <sup>+0.30</sup> <sub>-0.30</sub>
06	5.08	7.52		
08	7.62	10.06		
14	15.42	17.68		
16	17.78	20.22	10.06	7.62
18	20.32	22.76		
20	22.86	25.30		
22	25.40	27.84		

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2008/12/15

核對 CHECKED BY

WENDY

比例 SCALE

1:1

ICSAXXTB1BC

圖號

00-XX

DRAWING NO.