

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 5,000 MΩ Min


• Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 14.5 g Min / Pin

MATERIAL

- Insulator : PBT, UL 94V-0
 - Contact : Phosphor Bronze Thickness 0.17mm
 - Contact Plated : Sn-Cu Plated
- Operation Temperature : - 25°C to + 85°C

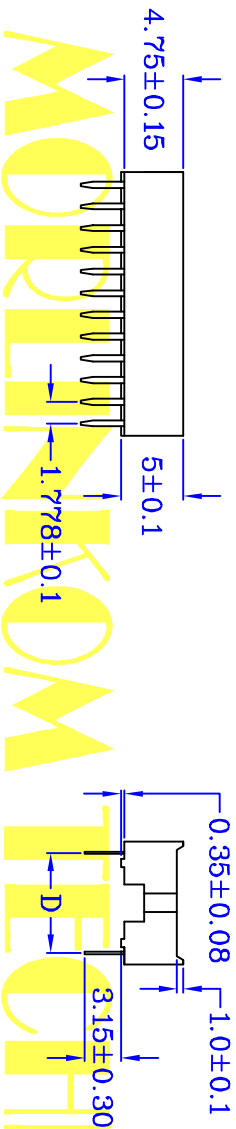

HIC5XXTB1BC	DIMENSION		
CONTACTS	A±0.20	B±0.20	C±0.20 D±0.20
16	12.45	14.22	
20	16.00	17.78	
22	17.78	19.56	10.10 7.62
24	19.56	21.34	

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tpts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2008/12/18

核對 CHECKED BY

WENDY

比例 SCALE

1:1

HIC5XXTB1BC

圖號

30-XX-02

DRAWING NO.