

## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 5,000 MΩ Min

• Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds


### MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 14.5 g Min / Pin

### MATERIAL

- Insulator : PBT, UL 94V-0
- Contact : Phosphor Bronze Thickness 0.17mm
- Contact Plated : Sn-Cu Plated

Operation Temperature : - 25°C to + 85°C

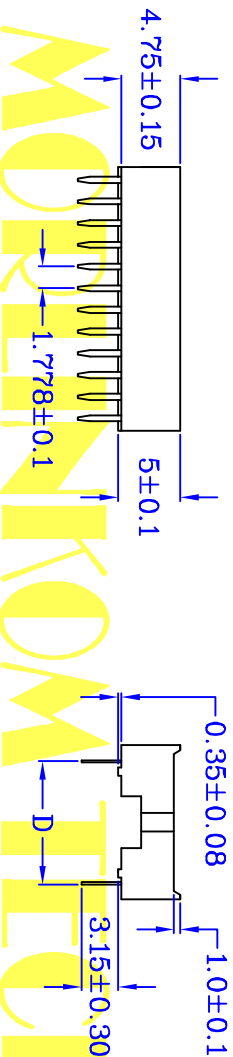

HIC8XXTBIAD	DIMENSION			
CONTACTS	A±0.20	B±0.20	C±0.20	D±0.20
24	19.56	21.34		
28	23.11	24.89		
30	24.89	26.67	12.65	10.16
32	26.67	28.45		

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tpts6.seed.net.tw

MORLINTKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen88888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2008/12/19

核對 CHECKED BY

WENDY

比例 SCALE

1:1

HIC8XXTBIAD

圖號

30-XX-07

DRAWING NO.