

SPECIFICATIONS

ELECTRICAL



- Contact Current Rating : 1 Ampere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 14.5 g Min / Pin

MATERIAL

- Insulator : PBT, UL 94V-0
 - Contact : Phosphor Bronze Thickness 0.17mm
 - Contact Plated : Sn-Cu Plated
- Operation Temperature : - 25°C to + 85°C

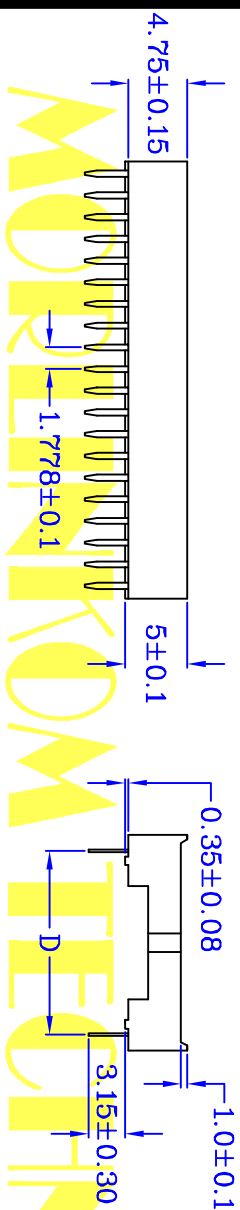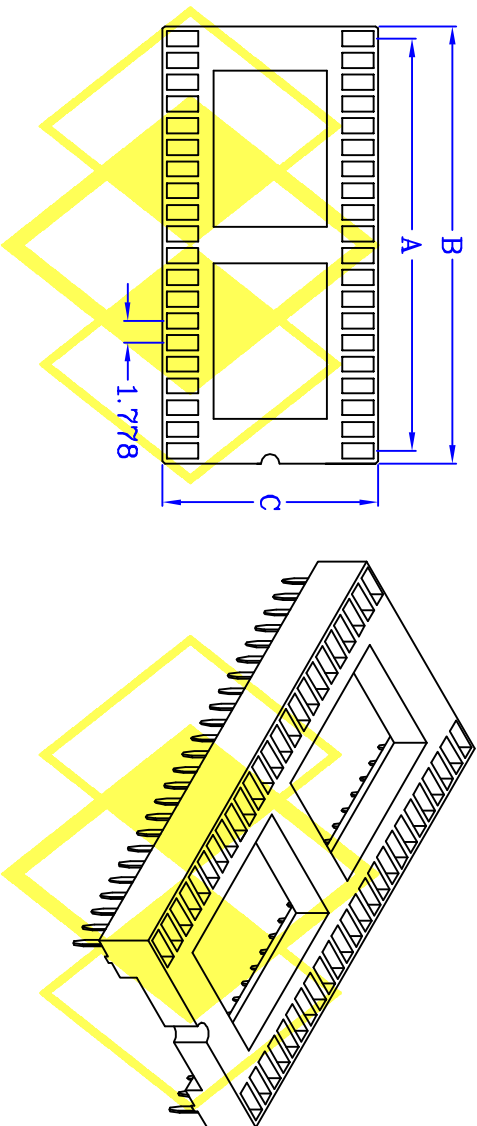

HIC5XXTB1AE	DIMENSION		
CONTACTS	A±0.20	B±0.20	C±0.20
40	33.78	35.56	
42	35.56	37.34	
48	40.89	42.67	
52	44.45	46.23	
54	46.23	48.01	17.70
56	48.01	49.78	15.24
58	49.78	51.56	
60	51.56	53.34	
62	53.34	55.12	
64	55.12	56.90	

UNIT: mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tpts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

慶林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2008/12/19

核對 CHECKED BY

WENDY

比例 SCALE

1:1

HIC5XXTB1AE

圖號

30-XX

DRAWING NO.