

SPECIFICATIONS

ELECTRICAL


- Contact Current Rating : 1 Ampere
- Contact Resistance : 10 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Operating Voltage : 100V AC/DC
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

MECHANICAL

- Insertion Force : 250 g / Pin
- Extraction Force : 50 g / Pin
- Mechanical Life Cycle : 200 Min
- Insertion Force : 340 Grams Max .
- Extractions Force : 50 Grams MIN .

MECHANICAL

- Insulator : PBT , UL 94V-0
 - Contact : Beryllium Copper (BeCu)
 - Contact Plated : Selective Gold Plated Over Nickel
 - Pin(Outer Sleeve) : Brass-Tin Plated
- OPERATING TEMPERATURE : - 40°C to + 105°C

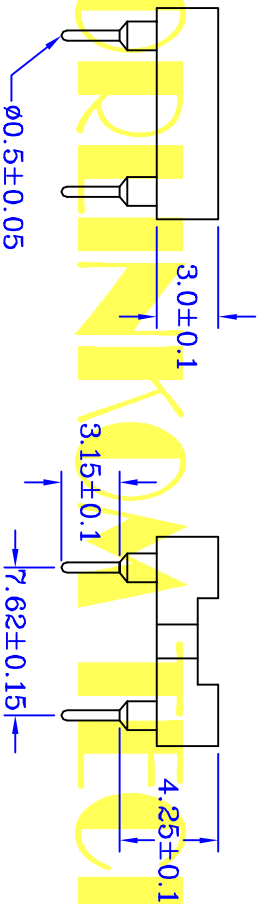

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@pts6.seed.net.tw

MORLINTOKO TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2009/08/31

ICSP08/ASB1BC

圖號

20-08/4

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAWING NO.

DRAWING NO.