

# SPECIFICATIONS

## ELECTRICAL

- Contact Current Rating : 1 Amperre
- Contact Resistance : 10 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Operating Voltage : 100V AC/DC
- Di electric Withstanding Voltage : 1,000V AC RMS 60 Seconds





## MECHANICAL

- Insertion Force : 250 g / Pin
- Extraction Force : 50 g / Pin
- Mechanical Life Cycle : 200 Min
- Insertion Force : 340 Grams Max .
- Extraxction Force : 50 Grams MIN .

## MECHANICAL

- Insulator : PBT , UL 94V-0
- Contact : Beryllium Copper~BeCu
- Contact Plated : Selective Gold Plated Over Nickel
- Pin(Outer Sleeve) : Brass , Tin Plated

OPERATING TEMPERATURE : - 40°C to + 105°C

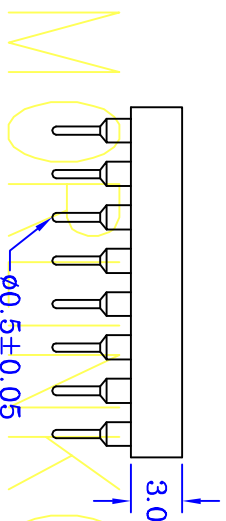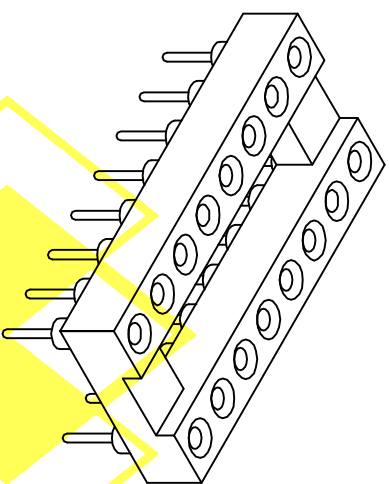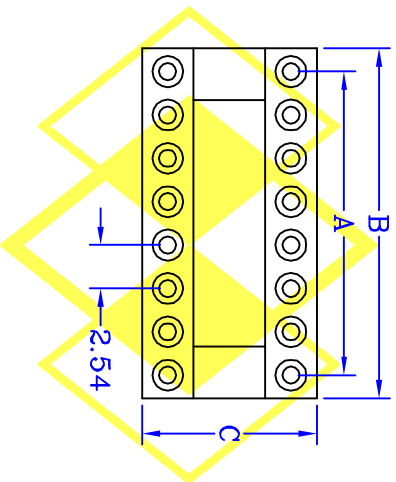

ICSRXXSBIBC	DIMENSION			
	A	B	C	D
CONTACTS	$+0$ $-0.20$	$+0.20$ $-0.20$	$+0$ $-0.20$	$+0.20$ $-0.20$
06	5.08	7.62		
08	7.62	10.16		
14	15.24	17.78	10.16	7.62
16	17.78	20.32		
18	20.32	22.86		

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

核對 CHECKED BY

WENDY

日期 DATE

2008/12/16

比例 SCALE

1:1

ICSRXXSBIBC

圖號

20-XX

DRAWING NO.