

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 10 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Operating Voltage : 100V AC/DC
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds


MECHANICAL

- Insertion Force : 250 g / Pin
- Extraction Force : 50 g / Pin
- Mechanical Life Cycle : 200 Min
- Insertion Force : 340 Grams Max .
- Extraction Force : 50 Grams MIN .

MECHANICAL

- Insulator : PBT , UL 94V-0
- Contact : Beryllium Copper (BeCu)
- Contact Plated : Selective Gold Plated Over Nickel
- Pin(Outer Sleeve) : Brass , Tin Plated

OPERATING TEMPERATURE : - 40°C to + 105°C

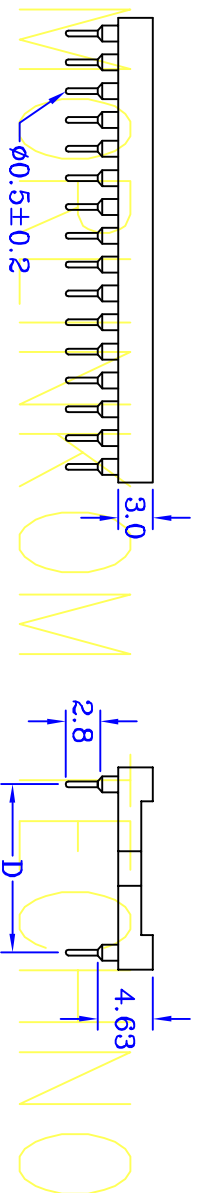

ICSRXXS BIAE	DIMENSION			
	A	B	C	D
CONTACTS	$+0$ -0.20	$+0.20$ -0.20	$+0$ -0.20	$+0.20$ -0.20
24	27.94	30.48		
28	33.02	35.56	17.78	
32	38.10	40.64		15.24

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

核對 CHECKED BY

WENDY

日期 DATE

2008/12/16

比例 SCALE

1:1

ICSRXXS BIAE

圖號

20-XX

DRAWING NO.