


### SPECIFICATIONS

#### ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 15 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

#### MATERIAL

- Insulator : PBT, UL94V-0
  - Contact : Brass or Phosphor Bronze
  - Insulator Resistance : 1000MΩ Min. at DC 500 Volts.
  - Contact Plated : Gold or Tin Over Nickel Plated
- Operation Temperature : - 40°C to + 105°C

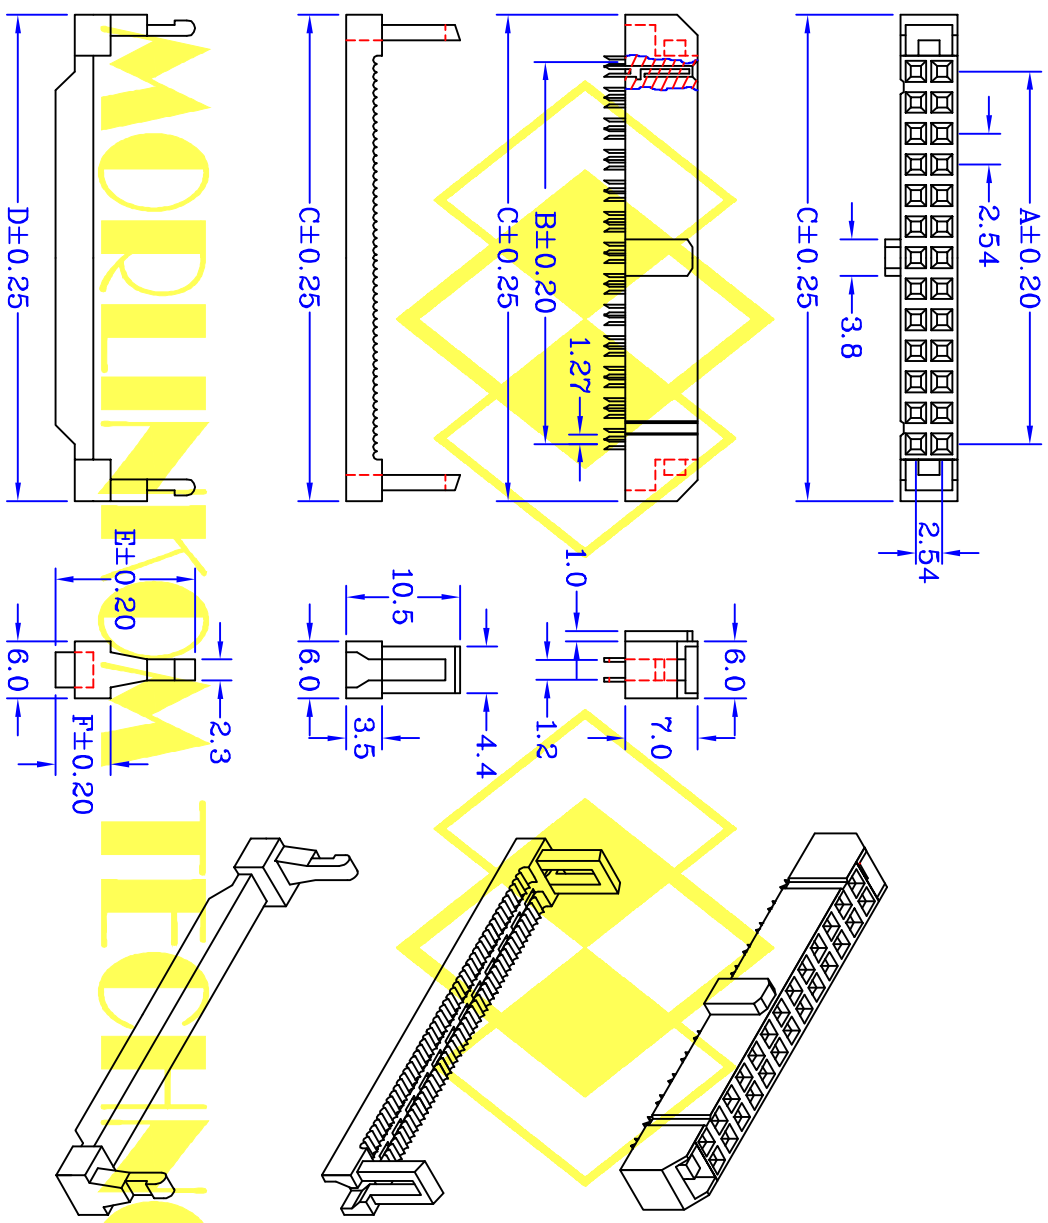

IDSSXSBIA1 CONTACTS	DIMENSIONS					
	A	B	C	D	E	F
06	5.08	6.35	12.32	12.12	13.55	5.00
08	7.62	8.89	14.86	14.66	13.55	5.00
10	10.16	11.43	17.40	17.20	13.55	5.00
12	12.70	13.97	19.94	19.74	13.55	5.00
14	15.24	16.51	22.48	22.28	13.55	5.00
16	17.78	19.05	25.02	24.82	13.55	5.00
18	20.32	21.59	27.56	27.36	13.55	5.00
20	22.86	24.13	30.10	29.90	13.55	5.00
24	27.94	29.21	35.18	34.98	13.55	5.00
26	30.48	31.75	37.72	37.52	13.55	5.00
30	35.56	36.83	42.80	42.80	13.45	4.85
34	40.64	41.91	47.88	47.68	13.55	5.00
36	43.18	44.45	50.42	50.22	13.55	5.00
40	48.26	49.53	55.50	55.30	13.55	5.00
44	53.34	54.61	60.58	60.38	13.55	5.00
50	60.96	62.23	68.20	68.40	13.45	4.85
60	73.66	74.93	80.90	80.70	13.55	5.00
64	78.74	80.01	85.98	85.78	13.55	5.00

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY 日期 DATE  
 FUFU 2009/02/05  
 核對 CHECKED BY 比例 SCALE  
 WENDY 1:1

圖號 280-XX  
 IDSSXSBIA1 DRAWING NO.