

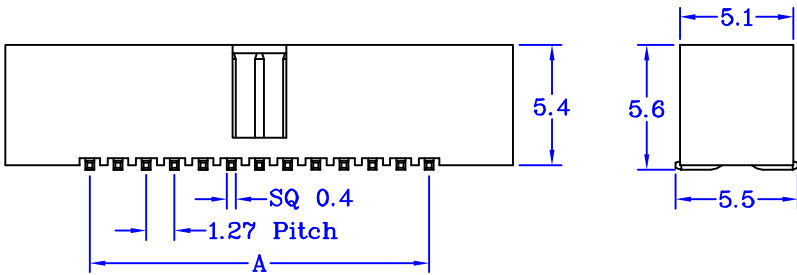
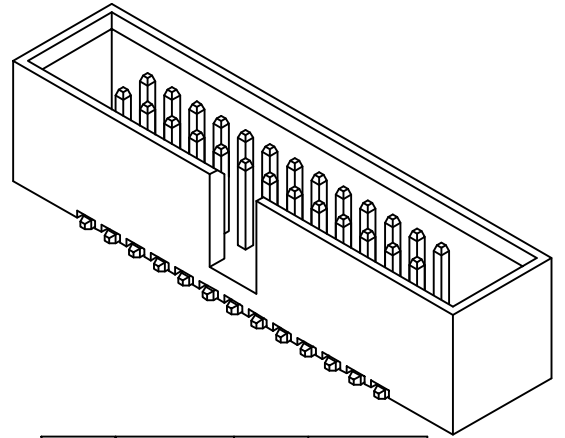


ORDERING INFORMATION

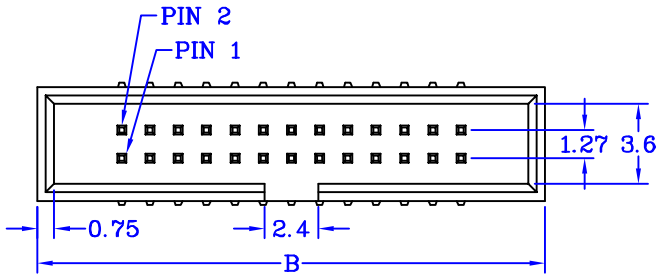

LHRXXGBI CONTACTS	DIMENSION		LHRXXGBI CONTACTS	DIMENSION	
	A	B		A	B
06	2.54	10.11	34	20.32	27.89
08	3.81	11.38	36	21.59	29.16
10	5.08	12.65	40	24.13	31.70
12	6.35	13.92	44	26.67	34.27
14	7.62	15.19	50	30.48	38.05
16	8.89	16.46	60	36.83	44.40
18	10.16	17.73	64	39.37	46.94
20	11.43	19.00	66	40.64	48.21
24	13.97	21.54	68	41.91	49.48
26	15.24	22.81	80	49.53	57.10
30	17.78	25.35	100	62.23	69.80



Series

- LH : Pitch 2.54mm Box Header
- HLH : Pitch 2.0mm Box Header
- HHLH : Pitch 1.27mm Box Header
- SLH : Pitch 2.54mm Box Header SMT Type
- SHLH : Pitch 2.0mm Box Header SMT Type
- SHHLH : Pitch 1.27mm Box Header SMT Type

1. Terminal Type

- S : Straight Termination
- R : Right Angle Termination
- F : Flat Cable IDC Type
- FN : Flat Cable IDC Type With Mounting Ears

2. Number of Contacts

- 06 08 10 12 14 16 18 20 22 24 26 30 32 34 40
- 44 50 60 64 66 80 100

3. Plating Option

- G : Gold Plated (Standard)
- T : Tin Plated
- S : Selective Plated

4. Products Logo

- A : Custom-Made
- B : Without Logo (Standard)

5. Insulator Color

- 1 : Black (Standard)

6. Width

- Blank : Width = 2.0mm ~ 2.54mm
- H : Width = 1.27mm & Square Pin 0.4mm

EXAMPLE : SHHLH S 34 G B 1 H

Pitch 1.27mm Box Header SMT Type
 Vertical 34 Pin Gold Plated Without Logo
 Insulator Color Black Width 1.27mm & Square Pin 0.4mm

Mbrlinkom Technology Ltd.