

SPECIFICATIONS

ELECTRICAL






- Contact Current Rating : 3 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : AC 500 V RMS 60 Seconds

MATERIAL

- Insulator : Nylon-6T
- Contact : Brass
- Contact Plated : Gold Plated (Standard) 、Tin Plated

Operation Temperature : - 40°C to + 150°C

Selective Plated

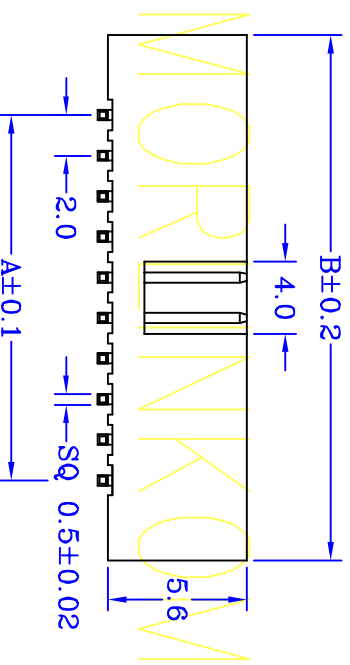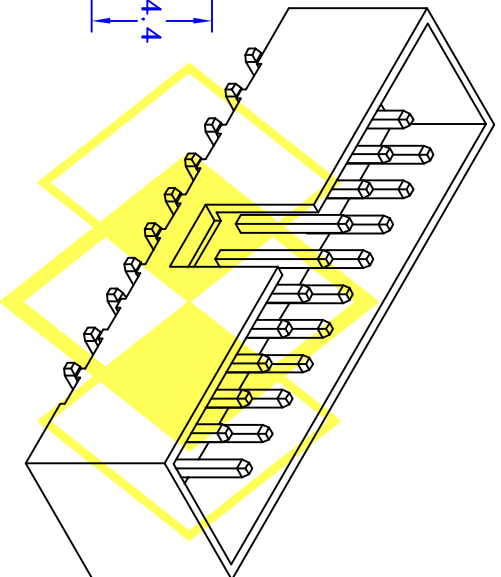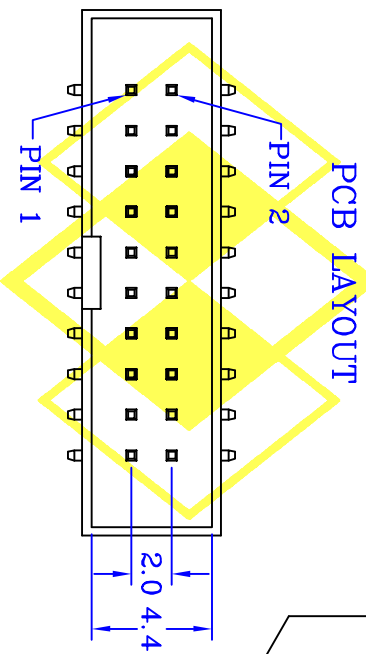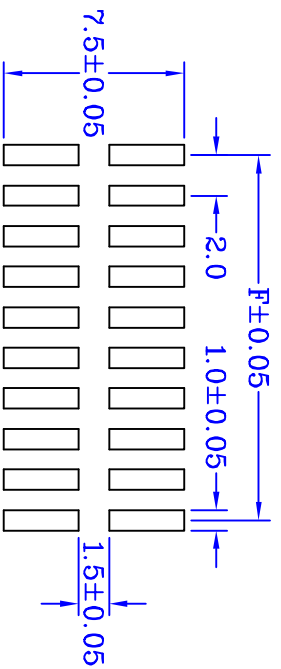

HLHSXXGB1 CONTACTS	DIMENSIONS	
	A	B
08	6.0	15.2
10	8.0	17.2
12	10.0	19.2
14	12.0	21.2
16	14.0	23.2
20	18.0	27.2
24	22.0	31.2
26	24.0	33.2
30	28.0	37.2
32	30.0	39.2
34	32.0	41.2
40	36.0	47.2
44	42.0	51.2
50	48.0	57.2
60	58.0	67.2
64	62.0	71.2
68	66.0	75.2

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLNKQW TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpnts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY
FUJFU

日期 DATE
2012/07/05

核對 CHECKED BY
REMUS

比例 SCALE
1:1

SHLHSXXGB1

圖號

325S-XX

DRAWING NO.