

**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 3 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : AC 500 V RMS 60 Seconds

**MATERIAL**


- Insulator : Nylon-9T
- Contact : Brass
- Contact Plated : Gold Plated (Standard) 、Tin Plated

Operation Temperature : - 40°C to + 150°C




Selective Plated

HLHSXXGBI CONTACTS	DIMENSION		
	A	B	C
04	2.00	9.30	8.30
06	4.00	11.30	10.30
10	8.00	15.30	14.30
12	10.00	17.30	16.30
14	12.00	19.30	18.30
16	14.00	21.30	20.30
18	16.00	23.30	22.30
20	18.00	25.30	24.30
24	22.00	29.30	28.30
26	24.00	31.30	30.30
30	28.00	35.30	34.30
34	32.00	39.30	38.30
40	38.00	45.30	44.30
44	42.00	49.30	48.30
50	48.00	55.30	54.30
60	58.00	65.30	64.30
64	62.00	69.30	68.30

UNIT : mm

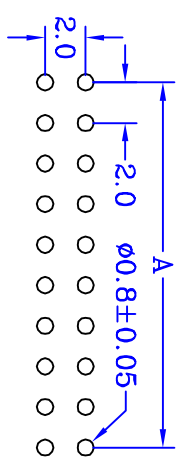

PCB LAYOUT

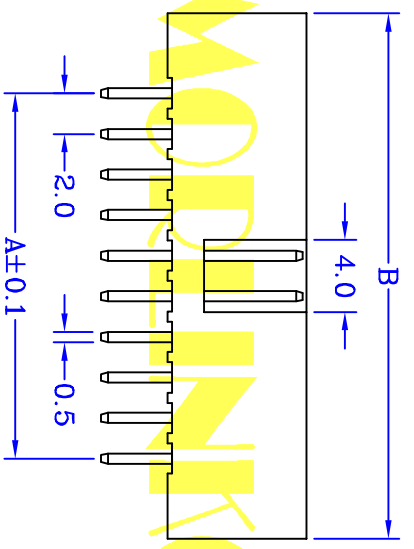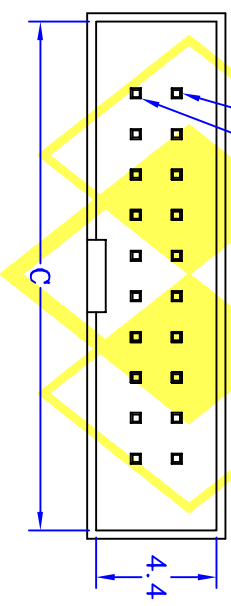

MORLINKOM TECHNOLOGY

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY FUJFU	日期 DATE 2008/12/23
核對 CHECKED BY WENDY	比例 SCALE 1:1

**HLHSXXGBI**

圖號  
DRAWING NO.  
**325-XX**