

SPECIFICATIONS


ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : AC 500 V RMS 60 Seconds

MATERIAL

- Insulator : PBT , UL 94V-0
- Contact : Brass
- Contact Plated : Selective Plated (Standard)

Gold Plated 、 Tin Plated
 Operation Temperature : - 40°C to + 150°C

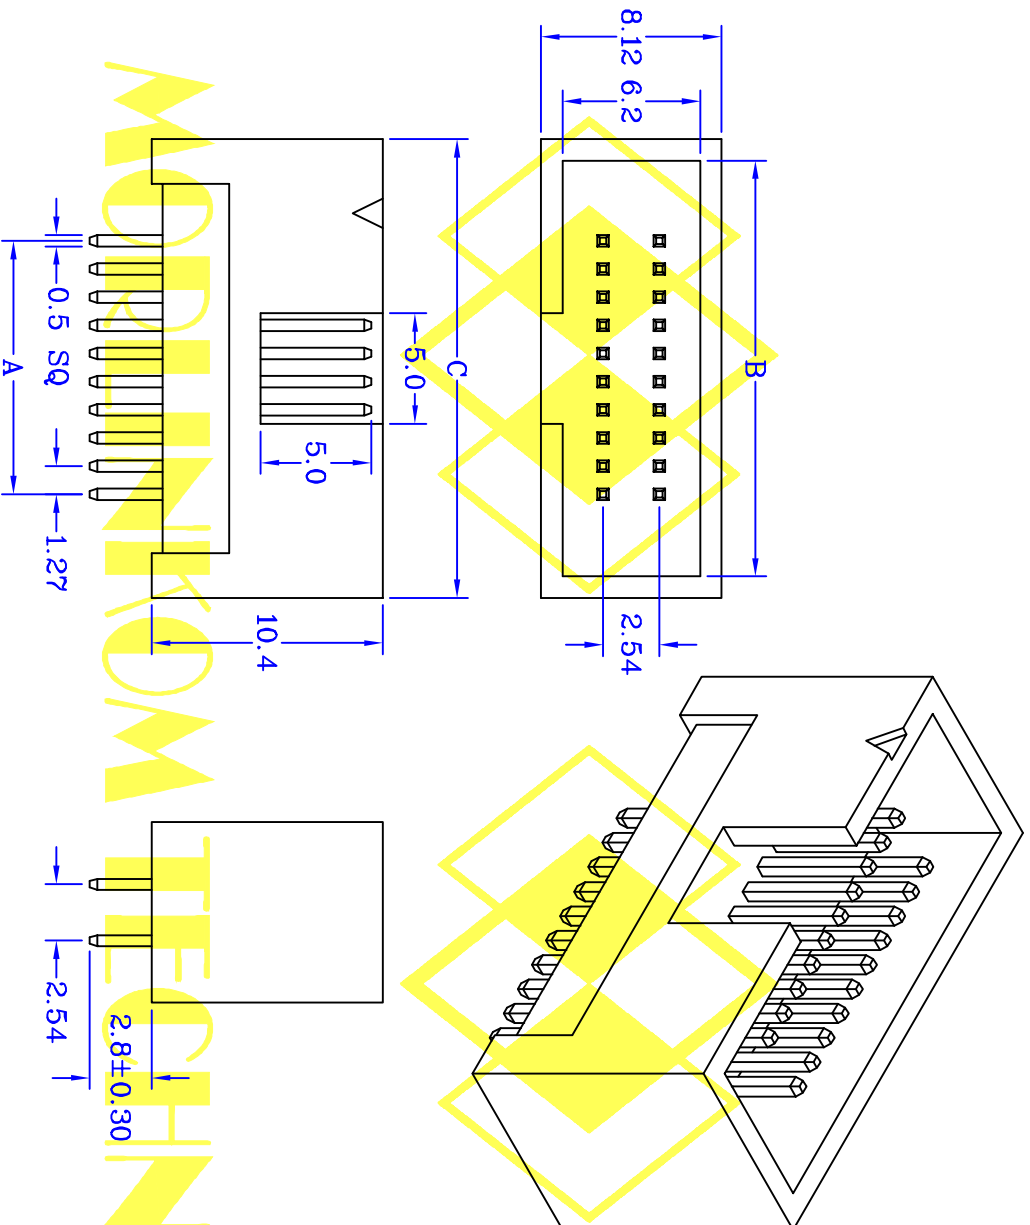

HHHSXXSBI CONTACTS	DIMENSIONS		
	A	B	C
20	11.43	18.75	20.95
26	15.24	22.56	24.76
32	19.05	26.37	28.57
34	20.32	27.64	29.84
40	24.13	31.45	33.65
50	30.48	37.80	40.00
52	31.75	39.07	41.27
60	36.83	44.15	46.35
68	41.91	49.23	51.43
80	49.53	56.85	59.05
100	62.23	69.55	71.75

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw

MORL INKOM TECHNOLOGY LTD

魔林科技有限公司

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

核對 CHECKED BY

WENDY

日期 DATE

2009/07/31

比例 SCALE

1:1

HHLSXXSBI

圖號

327-XX-H

DRAWING NO.