

# SPECIFICATIONS




## ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : AC 500 V RMS 60 Seconds

## MATERIAL

- Insulator : LCP
- Contact : Brass
- Contact Plated : Selective Plated (Standard)  
Gold Plated , Tin Plated

Operation Temperature : - 40°C to + 150°C

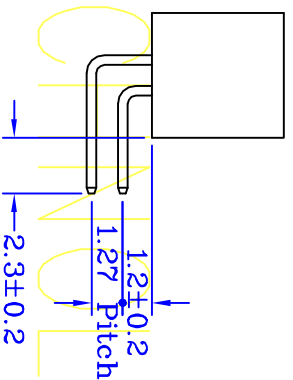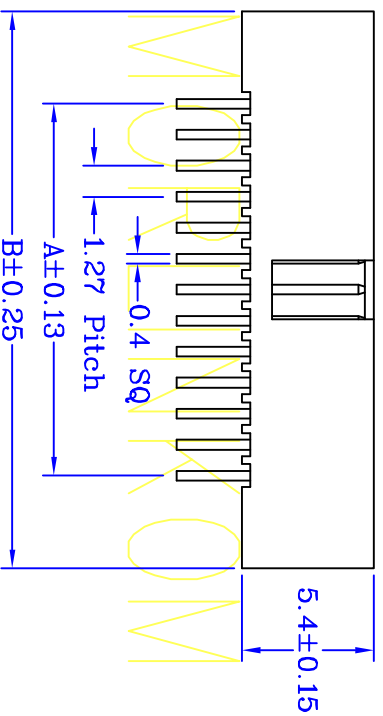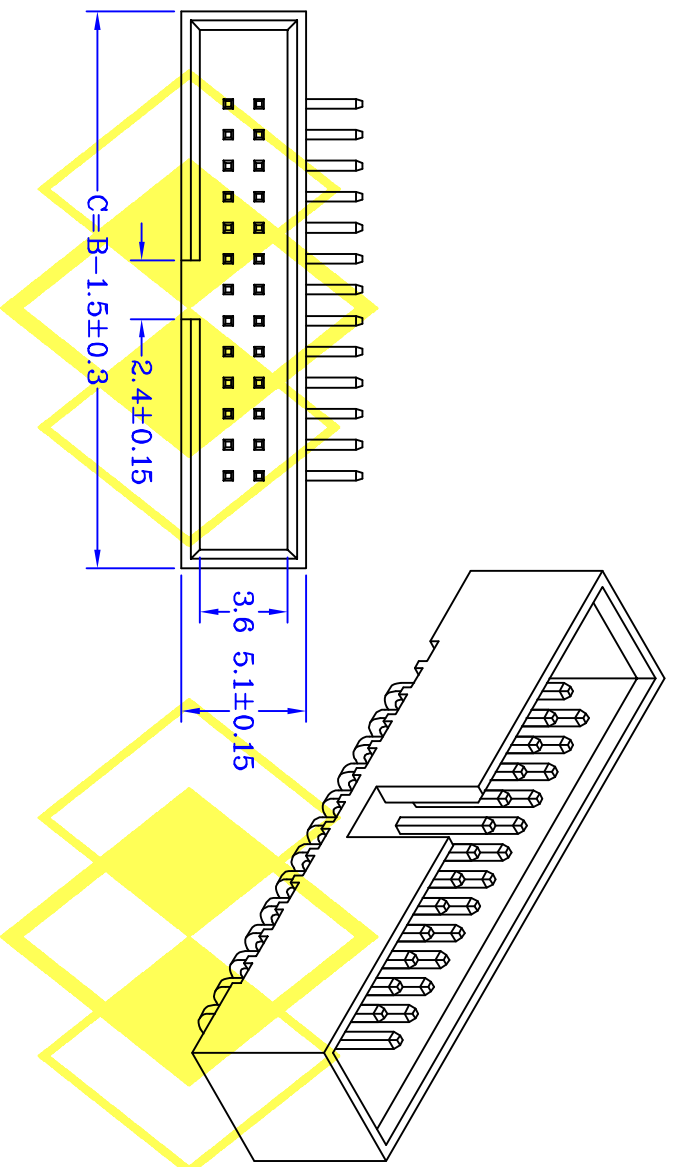

HHLHXXGB1 CONTACTS	DIMENSIONS	
	A	B
06	2.54	10.11
10	5.08	12.65
12	6.35	13.92
14	7.62	15.19
16	8.89	16.46
20	11.43	19.00
26	15.24	22.81
30	17.78	25.35
34	20.32	27.89
40	24.13	31.70
44	26.67	34.24
50	30.48	38.05
60	36.83	44.40
64	39.37	46.94
68	41.91	49.48
80	49.53	57.10
100	62.23	69.80

UNIT: mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL: 886-2-2686-8788

FAX: 886-2-2686-0018

E-MAIL: Centron@tpsts6.seed.net.tw

E-MAIL: Cen88888@gmail.com

繪圖

DRAWN BY  
WENDY

日期  
2014/04/22

核對  
CHECKED BY  
WENDY

比例  
SCALE  
1:1

HHLHXXGB1H

圖號

326R-XX-H

DRAWING NO.