



ORDERING INFORMATION

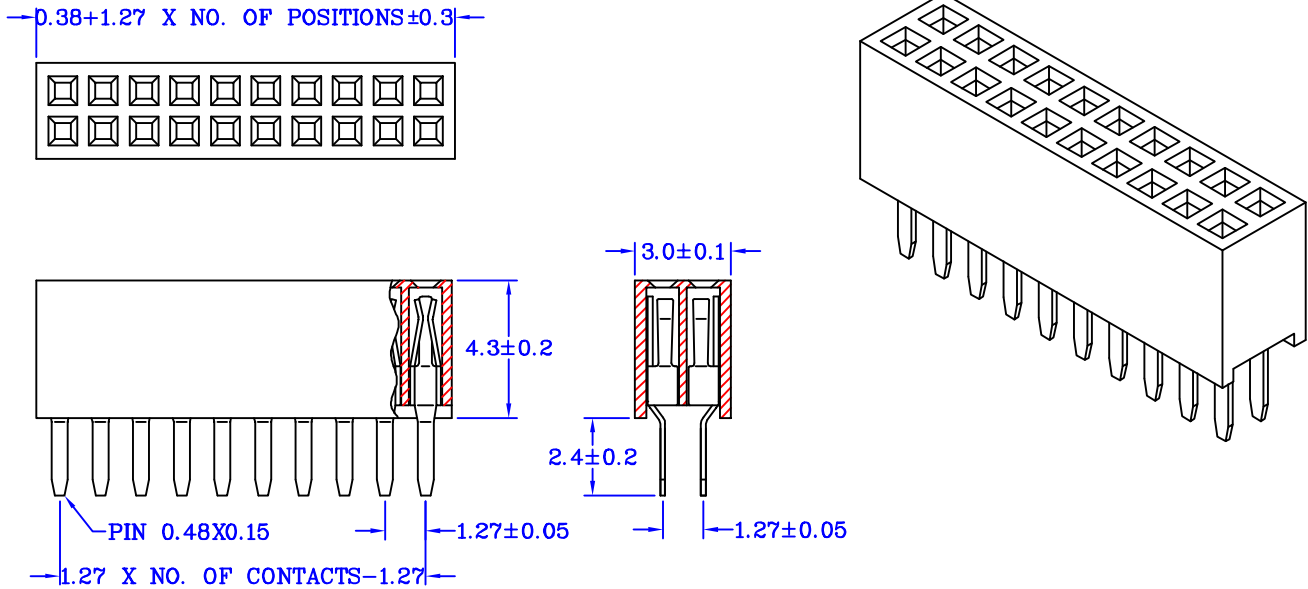

- Series**
- HHEF : Pitch 1.27mm Female Header General Contacts
 - HHPF : Pitch 1.27mm Female Header Touch on Three Sides
 - SHHPF : Pitch 1.27mm Female Header Touch on Three Sides SMT Type
- 1. Terminal Type**
- S : Straight Termination
 - R : Right Angle Termination
- 2. Row Type**
- 1 : Single Row 2 : Dual Rows
- 3. Number of Contacts**
- Single Row : 02 ~ 40 Contacts
 - Dual Rows : 04 ~ 80 Contacts In Total
- 4.Plating Option**
- G : Gold Plated (Standard)
 - T : Tin Plated
 - S : Selective Plated
- 5. Products Logo**
- A : Custom-Made
 - B : Without Logo (Standard)
- 6. Insulator Color**
- 1 : Black (Standard)
- 7. Plastic Height**
- Blank : (Standard)
 - 01-99 : Custom-Made
- 8. Contacts Insert Type**
- Blank : Row Width 2.54mm and Use Square Pin 0.46mm
 - H : Row Width 1.27mm and Use Square Pin 0.4mm

EXAMPLE : HHPF S 2 20 G B 1 H

Pitch 1.27mm Female Header Touch on Three Sides
 Straight Termination Dual Rows 20 Pin Gold Plated
 Without Logo Insulator Color Black
 Row Width 1.27mm and Use Square Pin 0.4mm

Mbrlinkom Technology Ltd.