



# ORDERING INFORMATION

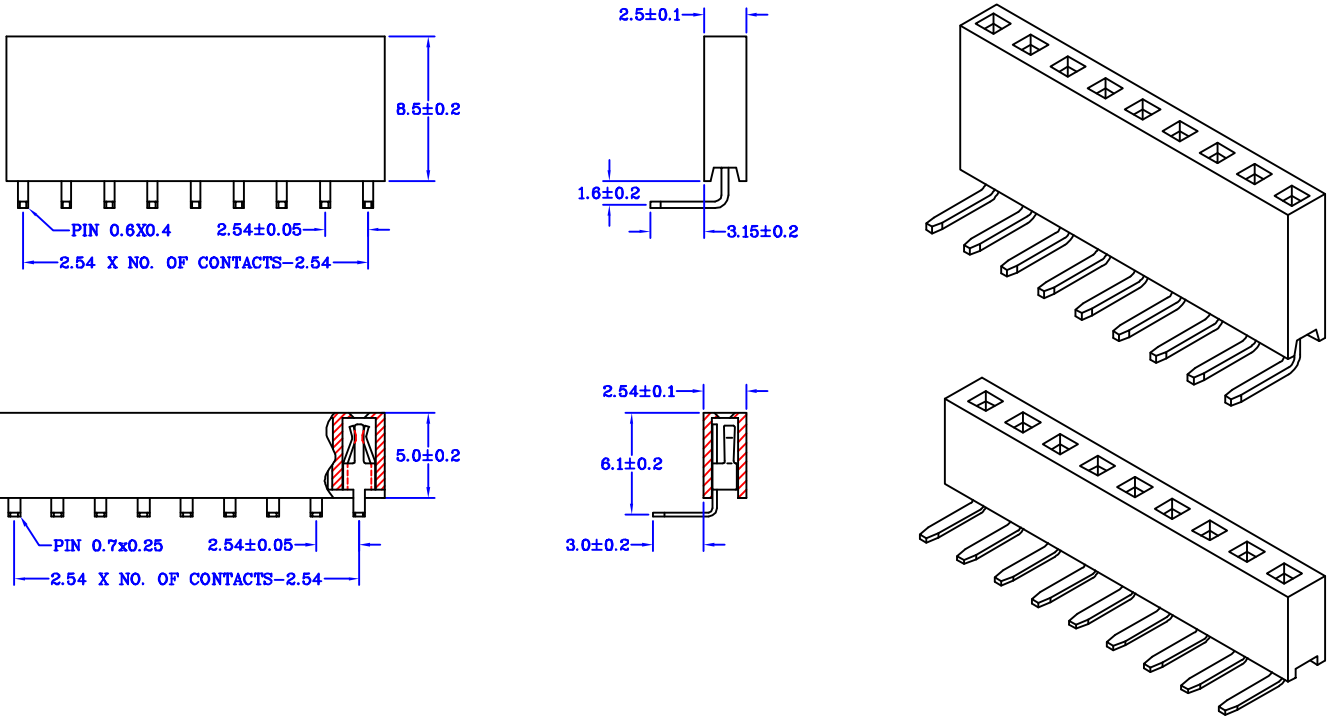

- Series
- HEF : Pitch 2.0mm Female Header General Contacts
  - HPF : Pitch 2.0mm Female Header Touch Three Sides
  - SHPF : Pitch 2.0mm Female Header Touch Three Sides SMT Type
  - EF : Pitch 2.54mm Female Header General Contacts
  - PF : Pitch 2.54mm Female Header Touch Three Sides
  - SEF : Pitch 2.54mm Female Header General Contacts SMT Type
  - SPF : Pitch 2.54mm Female Header Touch Three Sides SMT Type

- 1. Terminal Type
  - S : Straight Termination
  - R : Right Angle Termination
- 2. Row Type
  - 1 : Single Row    2: Dual Rows
- 3. Number of Contacts
  - Single Row : 02 ~ 40 Contacts
  - Dual Rows : 04 ~ 80 Contacts In Total
- 4.Plating Option
  - G : Gold Plated ( Standard )
  - T : Tin Plated
  - S : Selective Plated
- 5. Products Logo
  - A : Custom-Made
  - B : Without Logo ( Standard )
- 6. Insulator Color
  - 1 : Black ( Standard )
- 7. Plastic Dimension
  - Blank : ( Standard )
  - 01-99 : Custom-Made
- 8. Pin Length
  - Blank : ( Standard )
  - L01-L99 : Custom-Made
- 9. Plastic Type
  - Blank : Standard Type
  - T : Wave Type
  - N : With polarization bump
  - N+4 : With polarization bump and Widen 4 Pin
  - P : With Locating peg

EXAMPLE : EF R 2 22 G B 1 N+4

Pitch 2.54mm Female Header General Contacts  
 Right Angle Termination Dual Rows 22 Pin Gold Plated  
 Without Logo Insulator Color Black  
 With polarization bump and Widen 4 Pin

**Mbrlinkom Technology Ltd.**