



**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 1 Amperes
  - Contact Resi stance : 20 mΩ Max
  - Insulator Resi stance : 1,000 MΩ Min
  - Di electric Wl thstanding Vol tage : 500 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : Nylon-6T
  - Contact : Brass
  - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

UNIT : mm

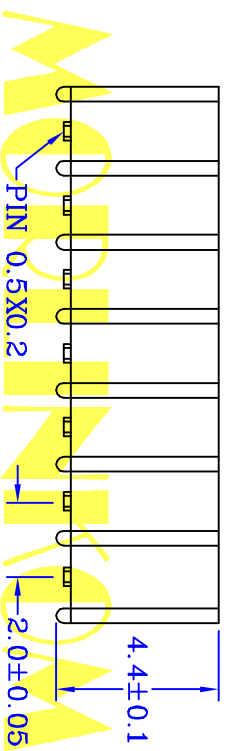

**MORLINTOKOM TECHNOLOGY LTD.**

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINTOKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	FUFU	2009/04/30	
CHECKED BY	WENDY	比例	SCALE
		1:1	

**HPFR1XXGB1**  
 圖號 896-XX  
 DRAWING NO.