


SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 3 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

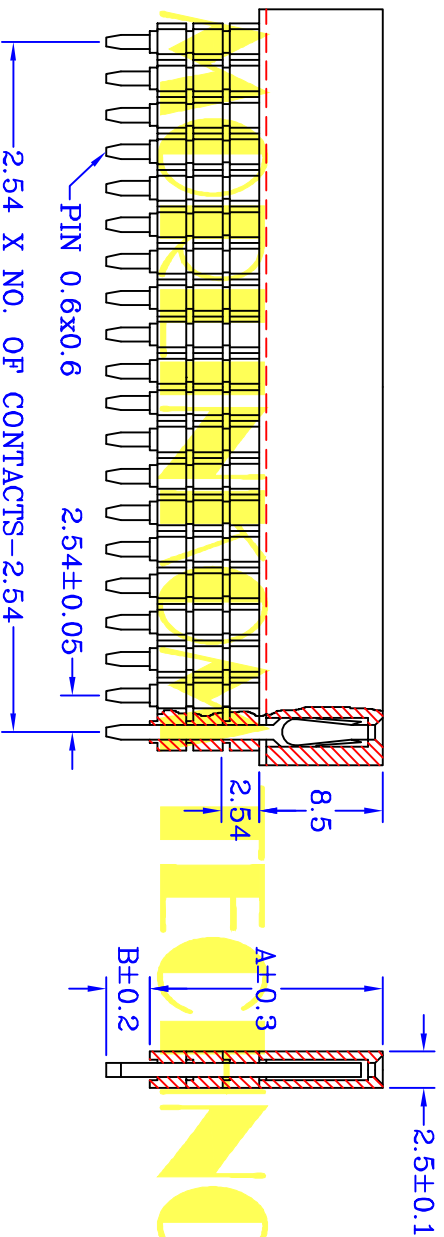

CONTACTS	A	B
1A	11.04	2.3
1B	11.04	12.2
1C	11.04	7.38
1H	11.04	2.9
2D	13.58	4.84
2E	13.58	9.65
3A	16.12	2.3
3F	16.12	7.1
3I	16.12	3.5
4G	18.66	4.6

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

E-MAIL: Centron@tp6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖

DRAWN BY
FUJFU

日期
2011/03/25

核對
CHECKED BY
WENDY

比例
SCALE
1:1

EPSIXGB1P(X)

圖號

200-XX-PXX

DRAWING NO.